


SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

11 Watt / CRI 93 + / 920 lm


ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 30 degrees in one direction
- Designed to put the focus on key areas
- Ideal for high-end application
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø75 mm

Size

Ø85 mm x H95 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

11 W

Luminous Flux

920 lm

Colour Rendering

Index 93+

Power Factor

> 0.90

Efficiency

88.8 lm/W

LED Type

CREE CXA1507

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL110 / 11W / 24° / 3000K

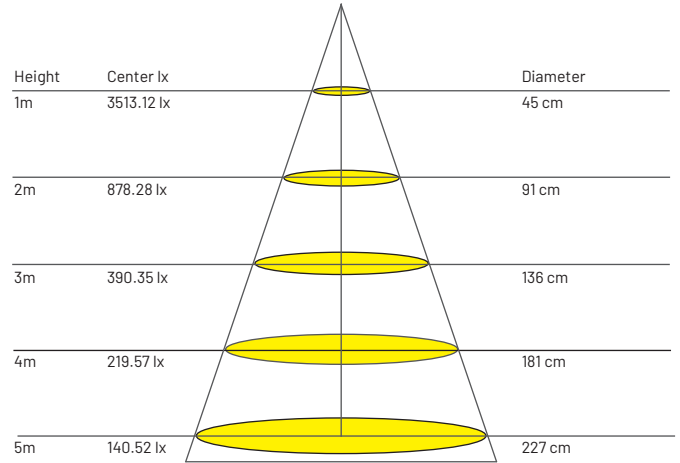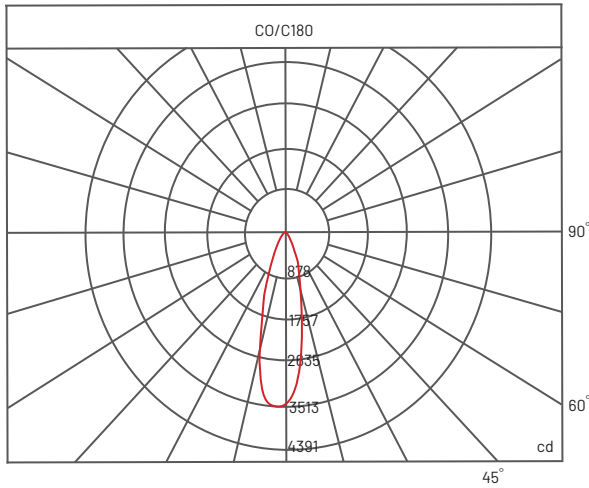

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL110 - WH - 3000K - 15° - DIM]

