



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Small and minimal in design
Niche lighting for contemporary or decorative settings
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K

Dimming

No

Cut-Out Size

Ø46 mm

Size

Ø55 mm x H60 mm

Beam Angle Selection

10°

Wattage

3 W

Luminous Flux

320 lm

Colour Rendering

Index 93+

Power Factor

> 0.90

Efficiency

106.6 lm/W

LED Type

CREE XP-G2

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL1504 / 3W / 10° / 3000K

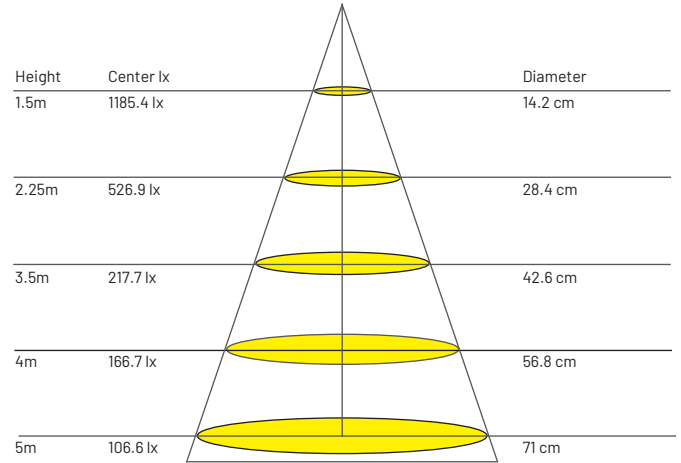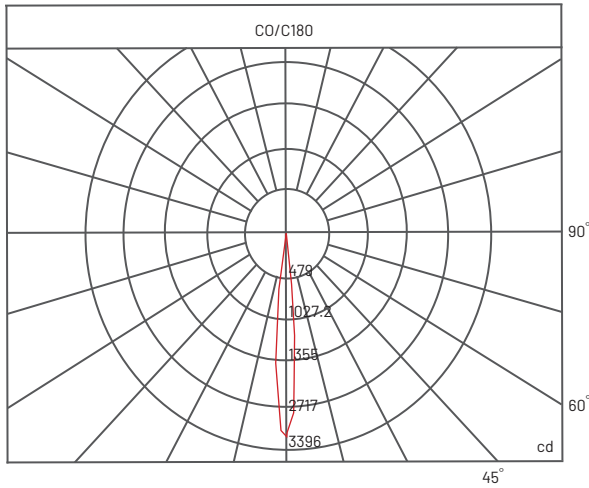

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1504 - WH - 3000K - 10° - NON-DIM]

CODE

SRL1504

TRIM COLOUR

WH

BK

CCT

3000K

BEAM ANGLE

10°

DIMMING

NON-DIM