


SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

13 Watt / CRI 93 + / 1061 lm



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø95 mm

Size

Ø110 mm x H95 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

13 W

Luminous Flux

1061 lm

Colour Rendering

Index 93+

Power Factor

> 0.98

Efficiency

81.6 lm/W

LED Type

CREE CXA1512

Driver System

Lifud LED Driver

IES

Available

Warranty

2 Years



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

13 Watt / CRI 93 + / 1061 lm

PHOTOMETRIC

SRL1512 / 13W / 24° / 3000K

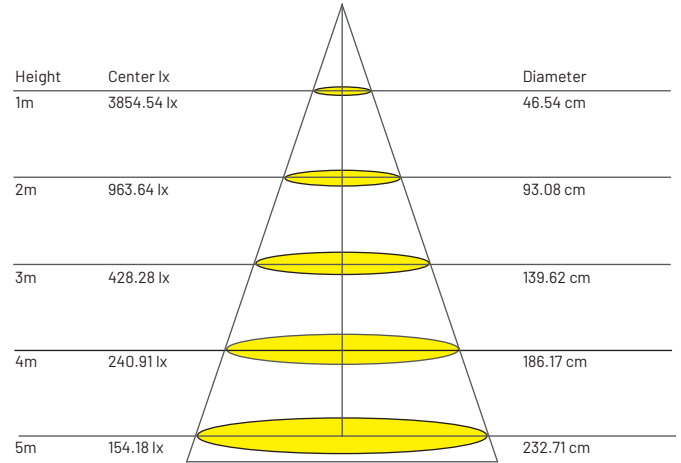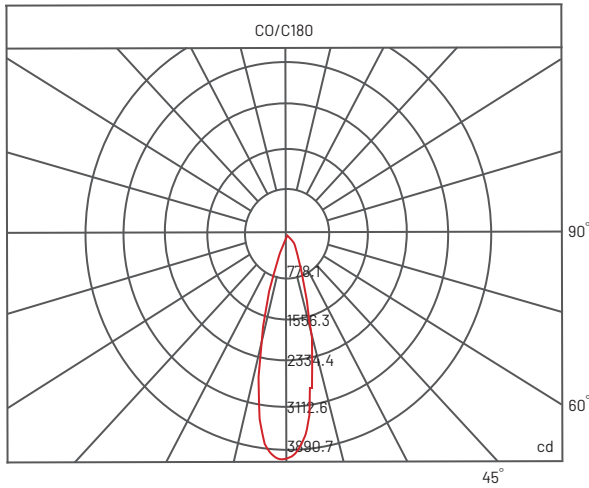

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1512 - WH - 3000K - 15° - DIM]

