

**ABOUT**

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

**Trim Colour**

○ White / ● Black

**Colour Temperature**

3000K / 4000K / 5000K

**Dimming**

Optional

**Cut-Out Size**

Ø120 mm

**Size**

Ø140 mm x H65 mm

**Beam Angle Selection**

38°

**Wattage**

20 W

**Luminous Flux**

1800 lm

**Colour Rendering**

Index 93+

**Power Factor**

> 0.97

**Efficiency**

90 lm/W

**LED Type**

CREE CXA1816

**Driver System**

Lifud LED Driver

**IES**



Available

**Warranty**

2 Years

**PHOTOMETRIC**

SRL1520S / 20W / 38° / 3000K

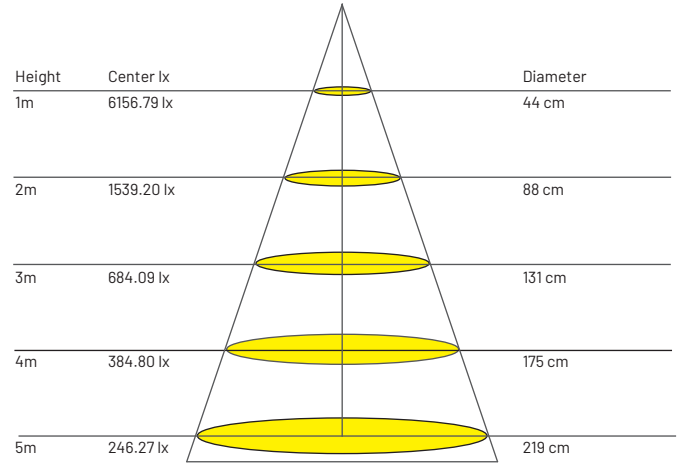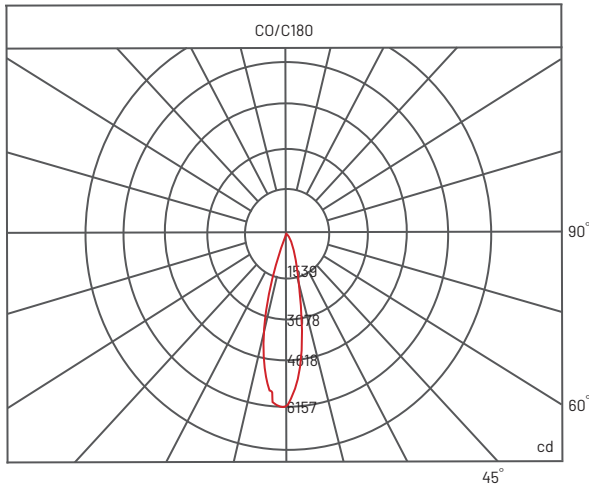

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

[ E.G. SRL1520S - WH - 3000K - 38° -DIM ]

