

### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

#### Trim Colour

○ White / ● Black

#### Colour Temperature

3000K / 4000K / 5000K

#### Dimming

Optional

#### Cut-Out Size

Ø95 mm

#### Size

Ø106 mm x H78 mm

#### Beam Angle Selection

15° / 24° / 38°

#### Wattage

15 W

#### Luminous Flux

1238 lm

#### Colour Rendering

Index 93+

#### Power Factor

> 0.98

#### Efficiency

82.5 lm/W

#### LED Type

CREE CXA1512

#### Driver System

Lifud LED Driver

#### IES

Available

#### Warranty

2 Years



## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

15 Watt / CRI 93 + / 1238 lm

### PHOTOMETRIC

SRL19578 / 15W / 24° / 3000K

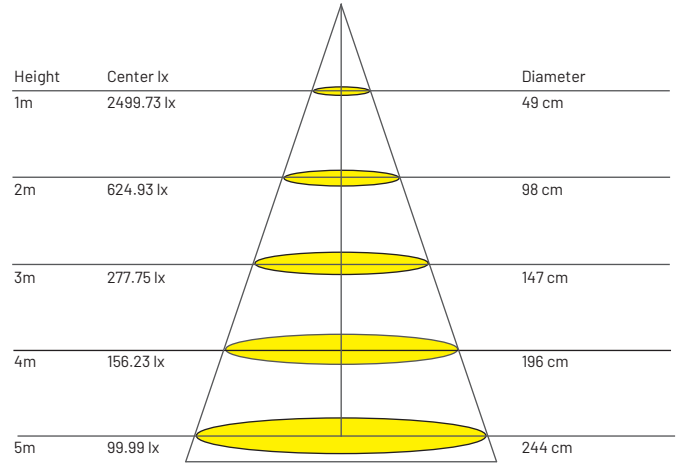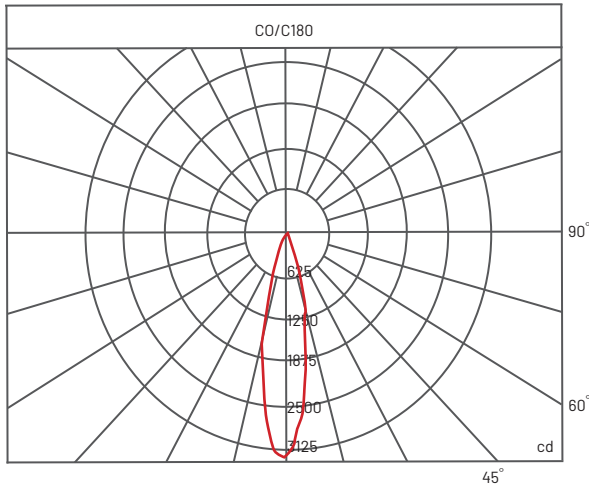

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

### PRODUCT ORDER CODE

[ E.G. SRL19578 - WH - 3000K - 15° - DIM ]

