



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Wider beam angle to accommodate high traffic areas
Ideal for back of house in hospitality, or projects requiring efficient luminosity
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

CCT Changeable
(3000K / 4000K / 6000K)

Dimming

NO

Cut-Out Size

Ø115 mm

Size

Ø135 mm x H66 mm

Beam Angle Selection

90°

Wattage

20 W

Luminous Flux

1700 lm

Colour Rendering

Index 90+

Power Factor

> 0.96

Efficiency

85 lm/W

LED Type

OSRAM

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL2220 / 20W / 90°

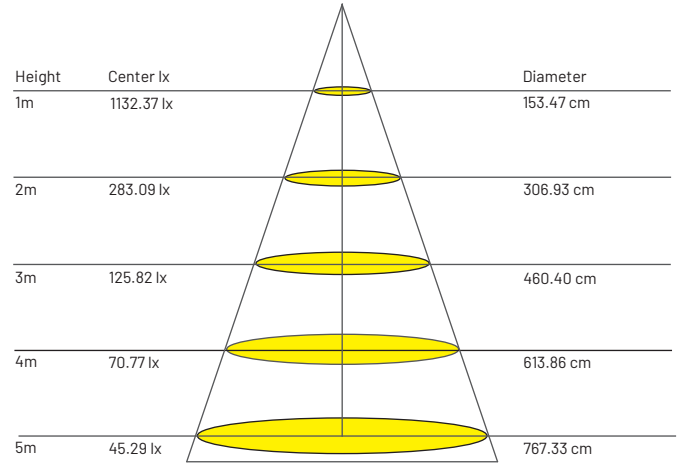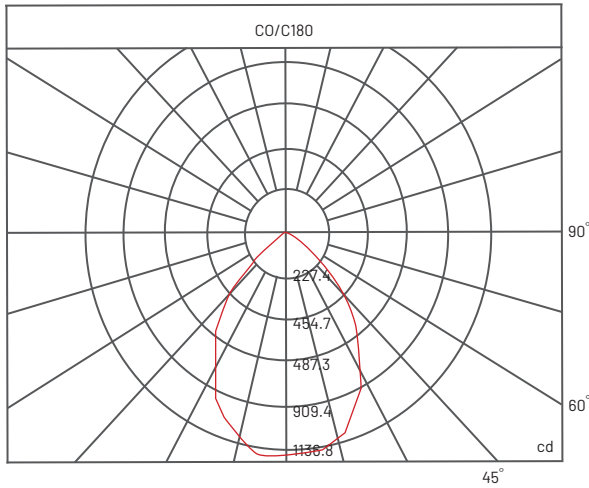

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL2220 - WH - CCT CHANGEABLE - 90° - NON-DIM]

