

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

9 Watt / CRI 93 + / 898 lm



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 15 degrees in both directions
- Versatile in residential, retail and hospitality settings
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø85 mm

Size

Ø100 mm x H100 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

9 W

Luminous Flux

898 lm

Colour Rendering

Index 93+

Power Factor

> 0.98

Efficiency

89.8 lm/W

LED Type

CREE CXA1507

Driver System

Lifud LED Driver

IES

Available

Warranty

2 Years



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

9 Watt / CRI 93 + / 898 lm

PHOTOMETRIC

SRL2810 / 9W / 24° / 3000K

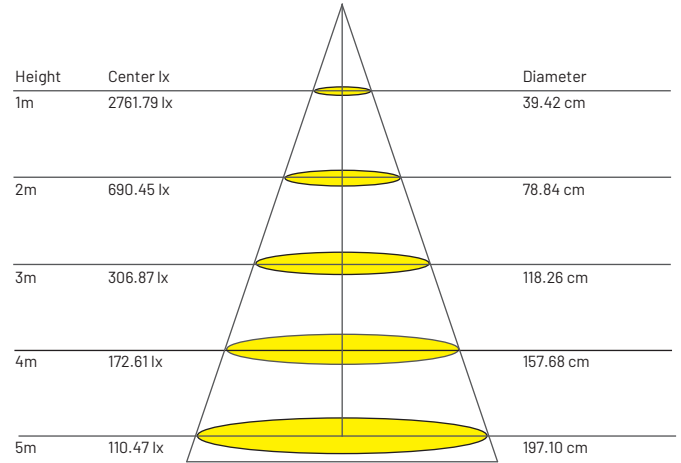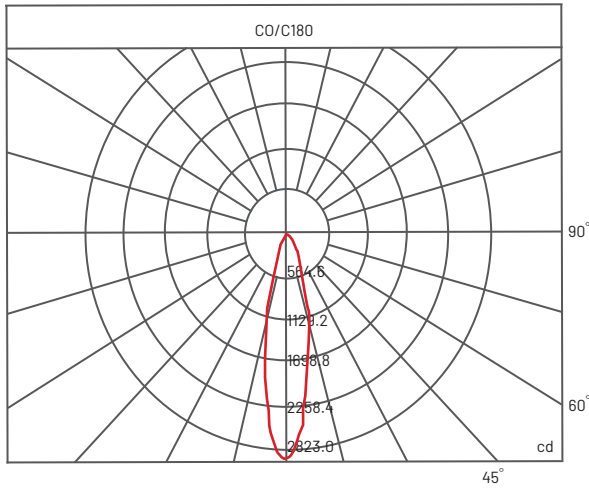

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL2810 - WH - 3000K - 15° - DIM]

