



### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 15 degrees in both directions
- Versatile in residential, retail and hospitality settings
- C-TICK and SAA Approved

#### Trim Colour

○ White / ● Black

#### Colour Temperature

3000K / 4000K / 5000K

#### Dimming

Optional

#### Cut-Out Size

Ø135 mm

#### Size

Ø152 mm x H136 mm

#### Beam Angle Selection

15° / 24° / 38°

#### Wattage

22 W

#### Luminous Flux

1850 lm

#### Colour Rendering

Index 93+

#### Power Factor

> 0.97

#### Efficiency

84.09 lm/W

#### LED Type

CREE CXA1816

#### Driver System

Lifud LED Driver

#### IES



Available

#### Warranty

2 Years

**PHOTOMETRIC**

SRL2820 / 22W / 24° / 3000K

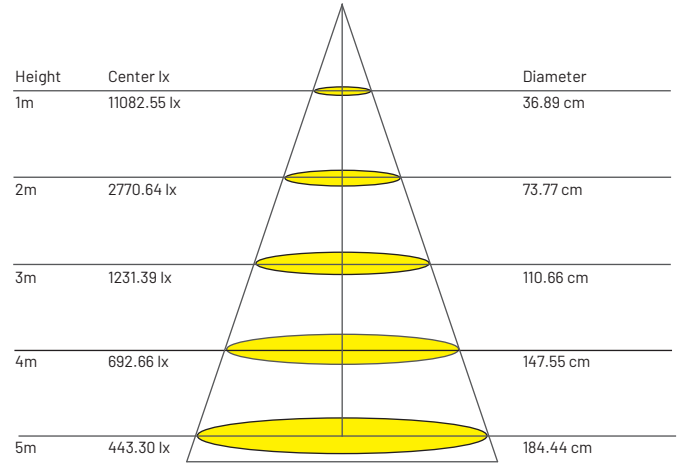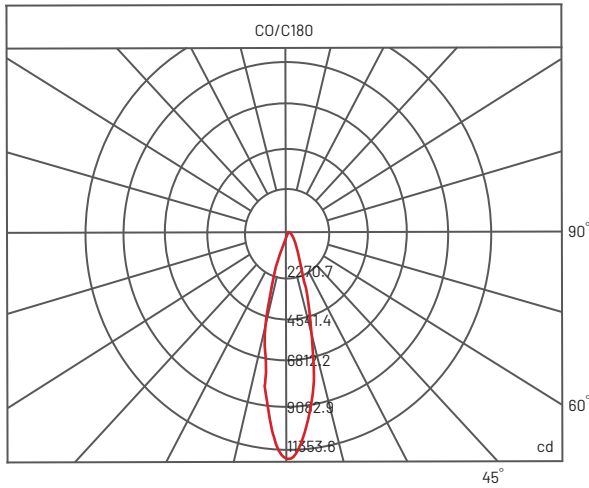

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

[ E.G. SRL2820 - WH - 3000K - 15° - DIM ]

