



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 90 degrees in both directions
- Designed for spot-focus lighting
- Ideal for product display
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø142 mm

Size

Ø152 mm x H122 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

26 W

Luminous Flux

2200 lm

Colour Rendering

Index 93+

Power Factor

> 0.95

Efficiency

84.6 lm/W

LED Type

CREE CXA1820

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL430 / 26W / 24° / 3000K

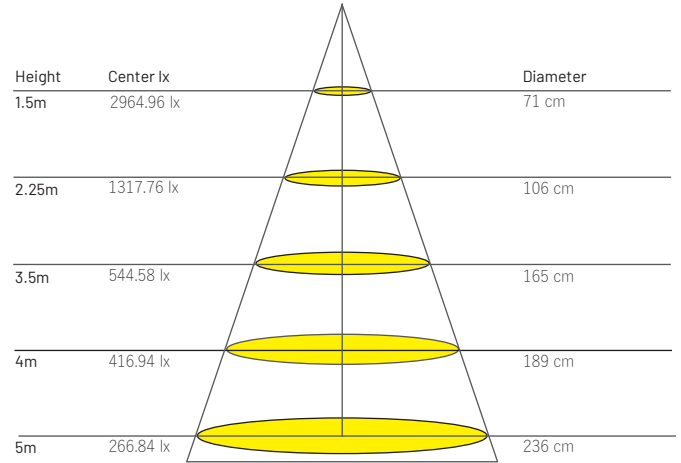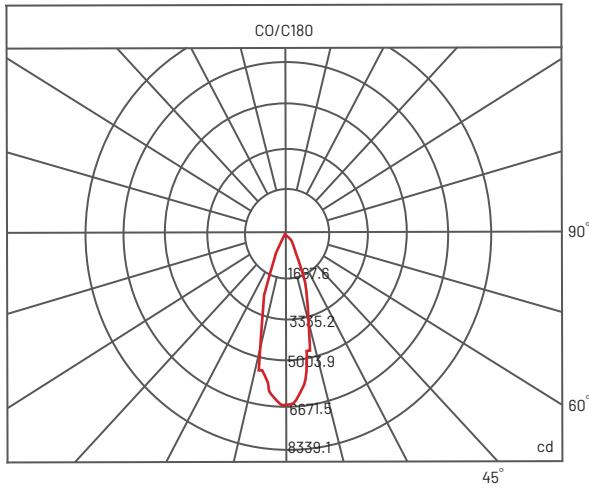

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL430 - WH - 3000K - 15° - DIM]

