

ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Bold twin-light design encased in rectangular frame
- Tiltable up to 30 degrees in both directions
- Versatile in retail and hospitality settings
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

305 mm x 160 mm

Size

325 mm x 175 mm x H115 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

50 W

Luminous Flux

4445 lm

Colour Rendering

Index 93+

Power Factor

> 0.96

Efficiency

88.9 lm/W

LED Type

CREE CXA1816

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL502E / 50W / 24° / 3000K

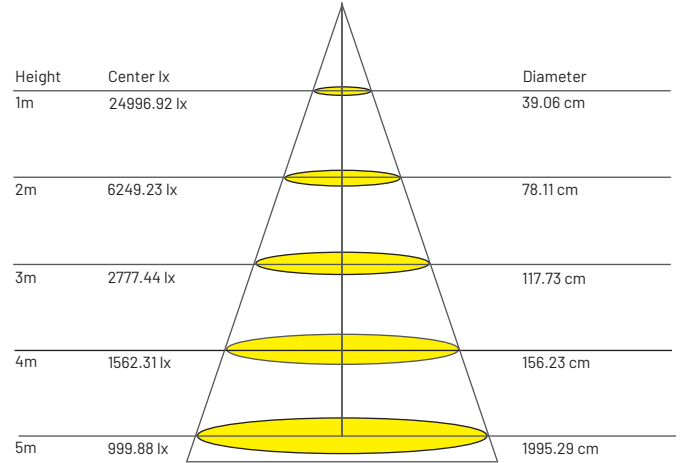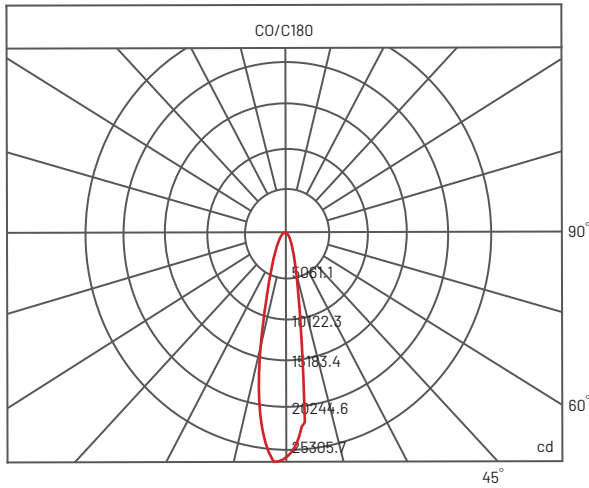

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL502E - WH - 3000K - 15° - DIM]

