



**ABOUT**

- Surface mounted COB fixed LED downlight designed with a sleek profile. Manufactured with aluminium body.
- Designed with no visible mounting screws providing a cleaner look.
- Ideal lighting solution for residential and commercial applications. Supplied with trailing driver.

**Trim Colour**

○ White / ● Black

**Colour Temperature**

3000K / 4000K / 5000K

**Dimming**

Non-Dim

**Size**

Ø85 mm x H100 mm

**IES**

Available

**Beam Angle Selection**

15° / 24° / 38°

**Wattage**

12 W

**Luminous Flux**

1067 lm

**Colour Rendering**

Index 93+

**Power Factor**

> 0.90

**Efficiency**

88.92 lm/W

**LED Type**

CREE CXA1507

**Driver System**



Lifud LED Driver

**Warranty**

2 Years

**PHOTOMETRIC**

SRL612 / 12W / 24° / 3000K

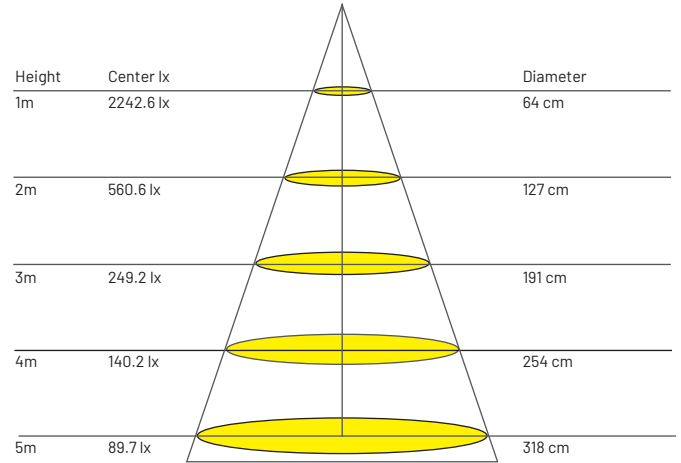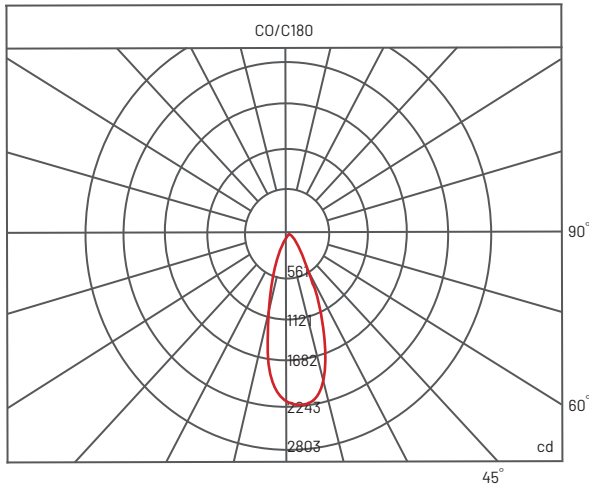

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

[ E.G. SRL612 - WH - 3000K - 15° - DIM ]

