



ABOUT

- Surface mounted COB fixed LED downlight designed with a sleek profile. Manufactured with aluminium body.
- Designed with no visible mounting screws providing a cleaner look.
- Ideal lighting solution for residential and commercial applications.
- Elongated and thinner body to make a statement. Supplied with trailing driver.

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Non-Dim

Size

Ø80 mm x H150 mm

IES

Available

Beam Angle Selection

15° / 24° / 38°

Wattage

12 W

Luminous Flux

1080 lm

Colour Rendering

Index 93+

Power Factor

> 0.90

Efficiency

90 lm/W

LED Type

CREE CXA1512

Driver System



Lifud LED Driver

Warranty

2 Years

PHOTOMETRIC

SRL612N / 12W / 24° / 3000K

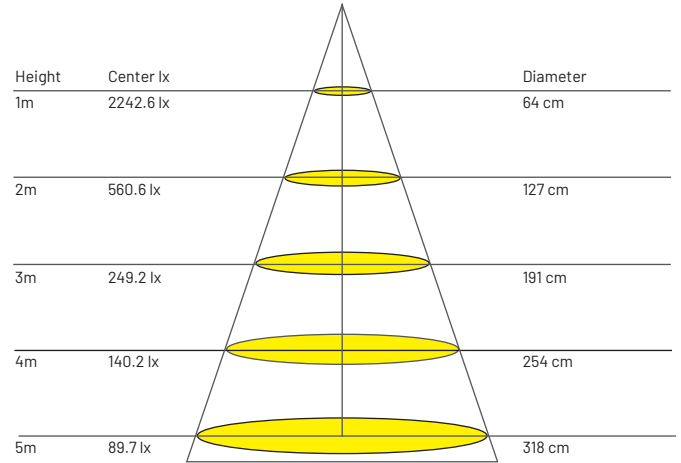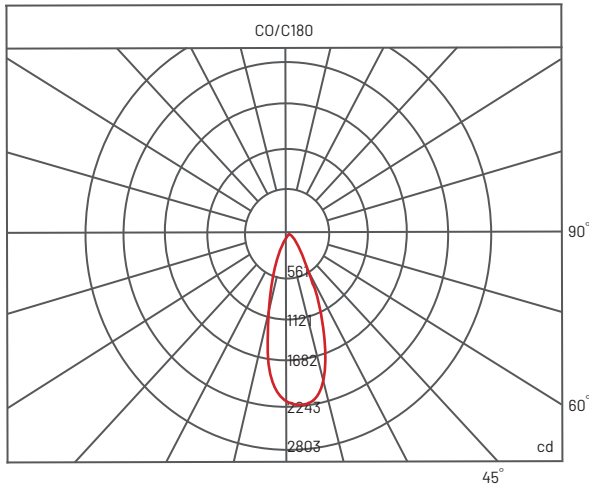

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL612N - WH - 3000K - 15° - DIM]

