



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø120 mm

Size

Ø140 mm x H95 mm

Beam Angle Selection

40°

Wattage

22 W

Luminous Flux

1980 lm

Colour Rendering

Index 93+

Power Factor

> 0.9

Efficiency

90.0 lm/W

LED Type

CREE CXA1816

Driver System

Lifud LED Driver

IES

Available

Warranty

2 Years



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

22 Watt / CRI 93 + / 1950 lm

PHOTOMETRIC

SRL822 / 22W / 40° / 3000K

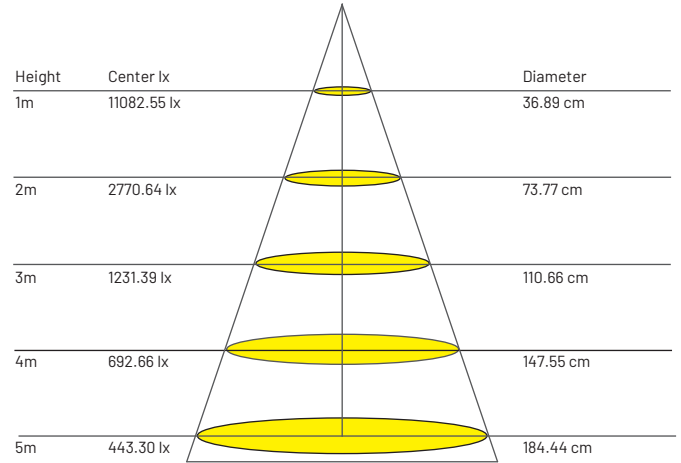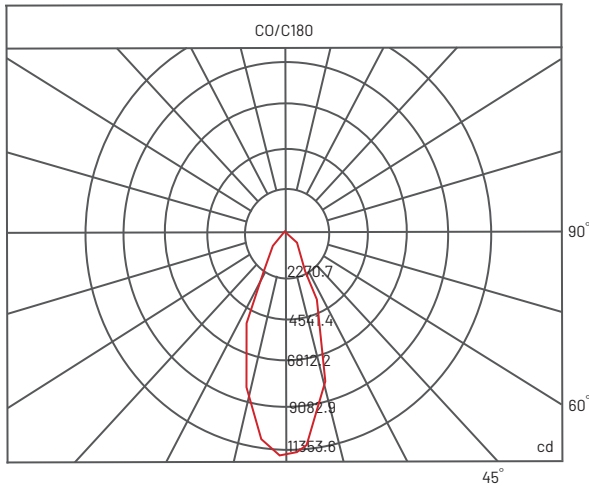

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL822 - WH - 3000K - 40° -DIM]

