



### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

#### Trim Colour

○ White / ● Black

#### Colour Temperature

3000K / 4000K / 5000K

#### Dimming

Optional

#### Cut-Out Size

Ø120 mm

#### Size

Ø130 mm x H108 mm

#### Beam Angle Selection

40°

#### Wattage

25 W

#### Luminous Flux

1862 lm

#### Colour Rendering

Index 93+

#### Power Factor

> 0.9

#### Efficiency

79.29 lm/W

#### LED Type

CREE CXA1820

#### Driver System

Lifud LED Driver

#### IES

Available

#### Warranty

2 Years



## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

25 Watt / CRI 93 + / 1862 lm

### PHOTOMETRIC

SRL825 / 22W / 40° / 3000K

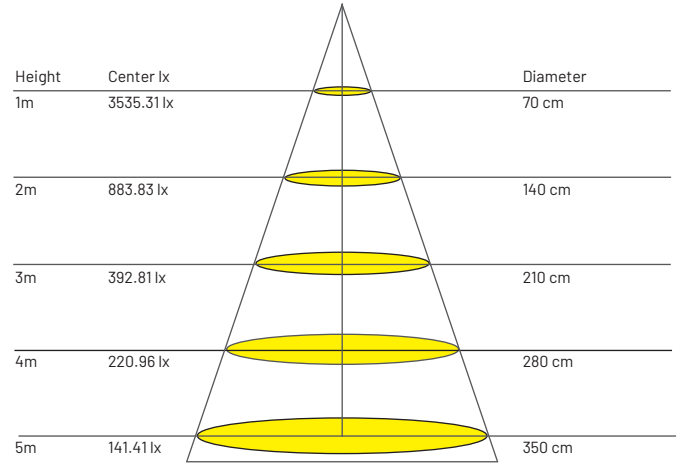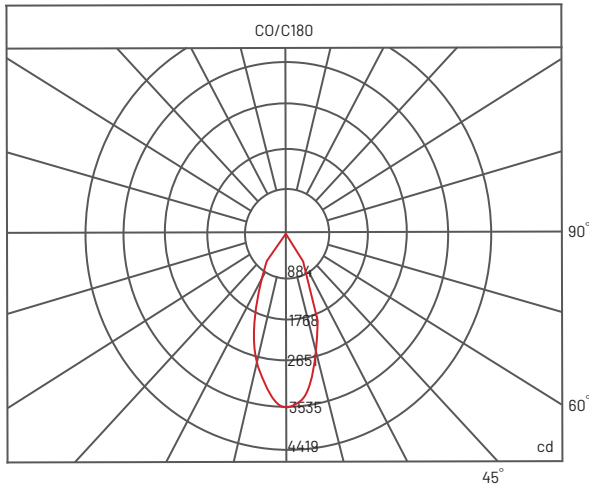

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

### PRODUCT ORDER CODE

[ E.G. SRL825 - WH - 3000K - 40° -DIM ]

