



## ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

### Trim Colour

○White

### Colour Temperature

3000K / 4000K / 5000K

### Dimming

Optional

### Cut-Out Size

Ø115 mm

### Size

Ø125 mm x H113 mm

### Beam Angle Selection

45°

### Wattage

28 W

### Luminous Flux

2756 lm

### Colour Rendering

Index 93+

### Power Factor

> 0.96

### Efficiency

96.0 lm/W

### LED Type

CREE CXA1820

### Driver System

Lifud LED Driver

### IES

Available

### Warranty

2 Years



## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

28 Watt / CRI 93 + / 2756 lm

### PHOTOMETRIC

SRL828 / 28W / 45° / 3000K

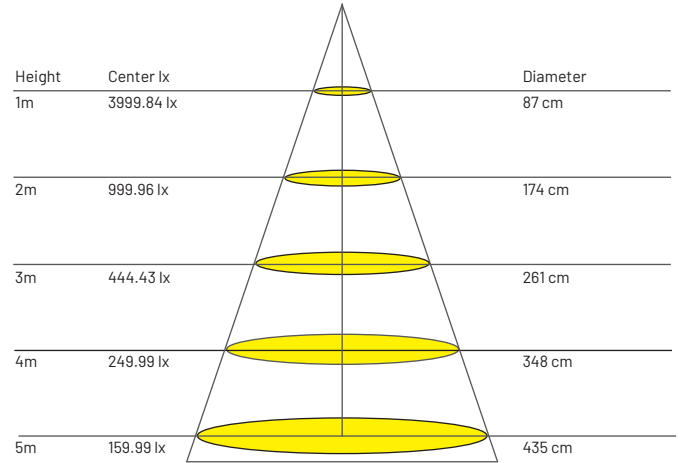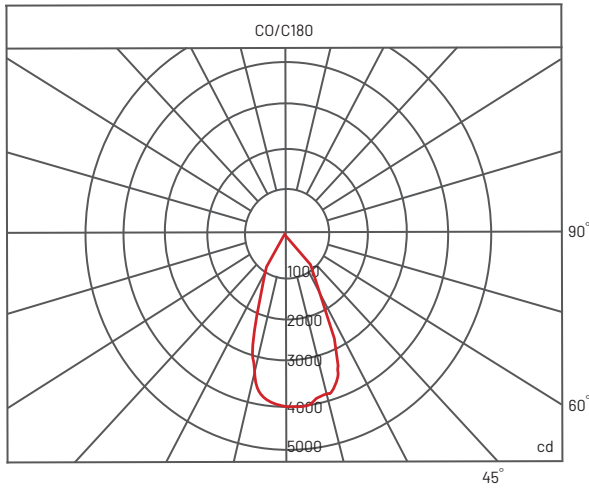

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

### PRODUCT ORDER CODE

[ E.G. SRL828 - WH - 3000K - 45° - DIM ]

