





SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

120LEDs/M - 9.6 W/M
 168LEDs/M - 9.6 W/M
 CRI 90 + / 2400 lm

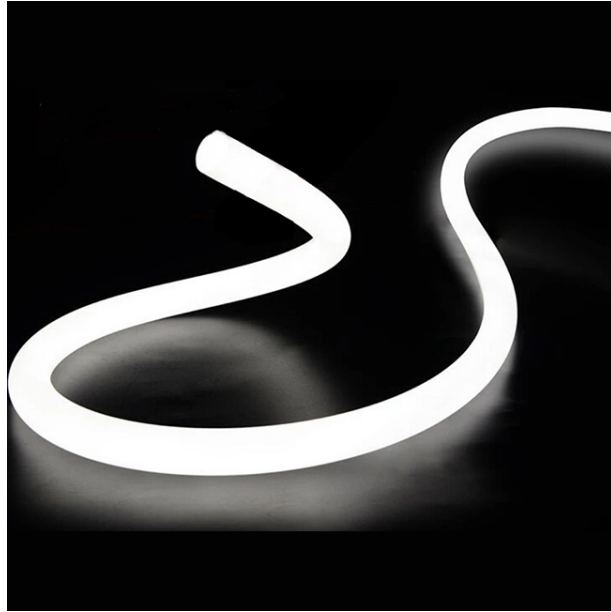

ABOUT

- Fully Flexible
- Can be paired with accessories for various use
- Customisable colour temperatures
- IP65 Waterproof
- Easy installation

LED Quantity & Rated Power

120LEDs/M - 9.6W/M / 168LEDs/M - 9.6W/M

Maximum Length

3M

Size

Ø22mm

Input Voltage

24V

Colour Temperature

2700K / 3000K / 4000K / 5000K/
 RED / GOLDEN / LEMON / GREEN /
 AQUA / ICE BLUE / BLUE / FUSCHIA

PCB Width

12mm

Beam Angle Selection

360°

Cutting Increment

25mm

Luminous Flux

2400 lm/M

LED Type

SMD2835

Colour Rendering

Index 90+

IP Rating

65

Warranty


2 Years

SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

120LEDs/M - 9.6 W/M
 168LEDs/M - 9.6 W/M
 CRI 90 + / 2400 lm

BEND MANUAL




Lighting Profile



Bending Direction



Bend Radius



Bend Radius

PRODUCT ORDER CODE

[E.G. EL D22 - 12V - 3000K - 120LEDs/M 9.6W/M - NON-DIM]

