
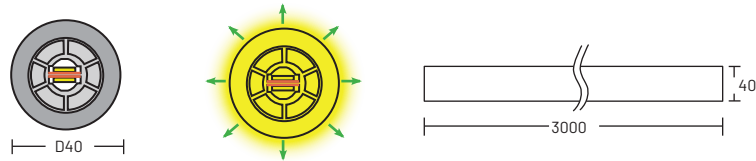


## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

120LEDs/M - 9.6 W/M | 168LEDs/M - 9.6 W/M  
 180LEDs/M - 12.6 W/M | 240LEDs/M - 15 W/M  
 CRI 90 + / 2400 lm

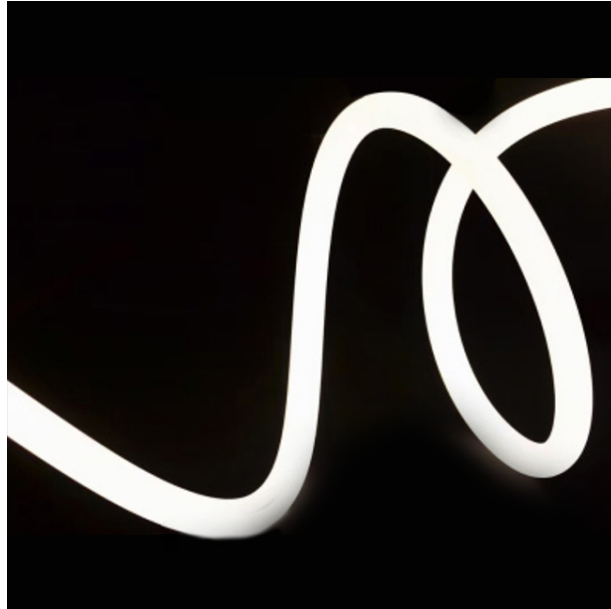

### ABOUT

- Fully Flexible
- Can be paired with accessories for various use
- Customisable colour temperatures
- IP65 Waterproof
- Easy installation

#### LED Quantity & Rated Power

120LEDs/M - 9.6W/M / 168LEDs/M - 9.6W/M  
 180LEDs/M - 12.6W/M / 240LEDs/M - 15W/M

#### Maximum Length

3M

#### Size

Ø40mm

#### Input Voltage

24V

#### Colour Temperature

2700K / 3000K / 4000K / 5000K/  
 RED / GOLDEN / LEMON / GREEN /  
 AQUA / ICE BLUE / BLUE / FUSCHIA

#### PCB Width

12mm

#### Beam Angle Selection

360°

#### Cutting Increment

25mm

#### Luminous Flux

2400 lm/M

#### LED Type

SMD2835

#### Colour Rendering

Index 90+

#### IP Rating

65

#### Warranty


2 Years

## SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

120LEDs/M - 9.6 W/M | 168LEDs/M - 9.6 W/M  
 180LEDs/M - 12.6 W/M | 240LEDs/M - 15 W/M  
 CRI 90 + / 2400 lm

## BEND MANUAL




Lighting Profile



Bending Direction



Bend Radius



Bend Radius

## PRODUCT ORDER CODE

[ E.G. EL D40 - 12V - 3000K - 120LEDs/M 9.6W/M - NON-DIM ]

