



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø92 mm

Size

Ø103 mm x H66 mm

Beam Angle Selection

38°

Wattage

15 W

Luminous Flux

1242 lm

Colour Rendering

Index 93+

Power Factor

> 0.95

Efficiency

82.86 lm/W

LED Type

CREE CXA1512

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL815 / 15W / 38° / 3000K

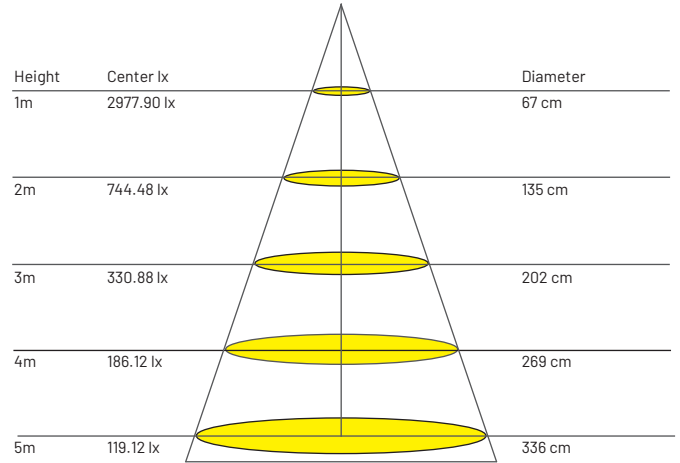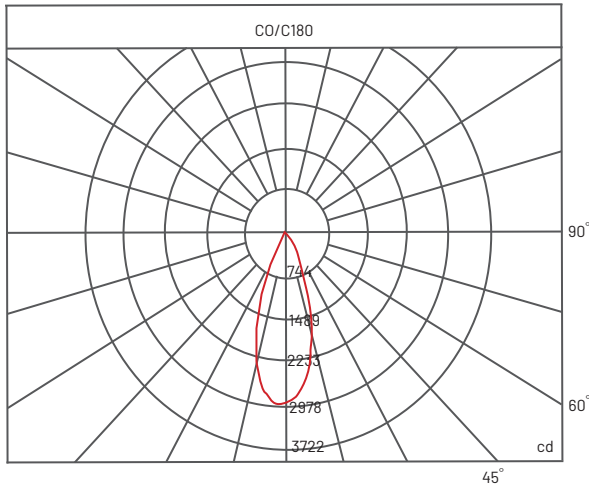

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL815 - WH - 3000K - 38° -DIM]

