## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

# DOWNLIGHT SRL835

35 Watt / CRI 93 + / 2919 Im









## ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour	Colour Temperature	Dimming
<b>O</b> White	3000K / 4000K / 5000K	Optional
Cut-Out Size	Size	Beam Angle Selection
Ø140 mm	Ø151 mm x H132 mm	45°
Wattage	Luminous Flux	Colour Rendering
35 W	2919.9 lm	Index 93+
Power Factor	Efficiency	LED Type
> 0.97	87.07 lm/W	CREE CXA1830
Driver System	IES	Warranty
Lifud LED Driver	Available	2 Years



### SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


# DOWNLIGHT SRL835

35 Watt / CRI 93 + / 2919 Im

#### **PHOTOMETRIC**

SRL835 / 35 W / 45° / 3000K



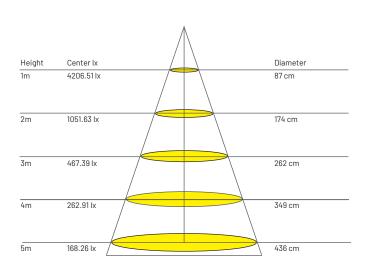

<sup>\*</sup>All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

### PRODUCT ORDER CODE

[ E.G. SRL835 - WH - 3000K - 45° - DIM ]

