




#### MAGNETIC TRACK (48V) MT-SUT23 MOUNTED TRACK

ounted Magnetic Track

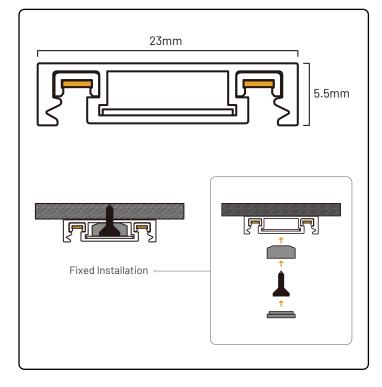

### 5.5mm Ultra-Thin Thickness

- Simplified Installation: The track bar can be integrated into non-primary lighting solutions, suitable for post-installation and tooling markets, making the installation process easier and more convenient.
- DIY Splicing: Users can perform DIY splicing to tailor configurations to their personal preferences.
- Space Aesthetics: DIY splicing allows for the creation of a more streamlined and concise aesthetic in the space.

# MT-SUT23

THINS MAGNETIC LINE TRACK

- □ Mounted Track
- 🗌 5.5mm Ultra-Thin Thickness
- □ 48V

#### Colour






#### Specifications

L2000mm x W23mm x H5.5mm

L3000mm x W23mm x H5.5mm

#### Accessories



Built-in Driver + Cable Storage MT-SUT23-100W/200W + MT-SUT23-LB






End Cap MT-SUT23-END

V. BROWN (Berur) V. BLIE	
Input Module - Head	

MT-SUT23-E-S




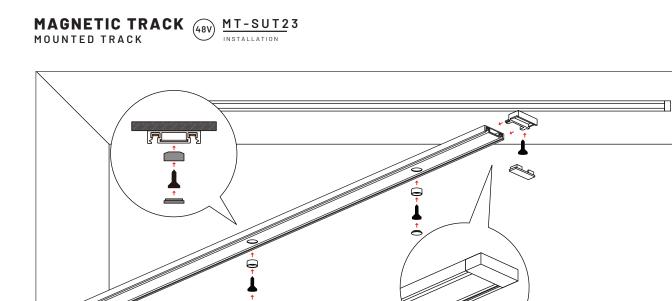

23mm 1 Mount the track bar on the ceiling as per your decoration plan. Insert positioning plugs into the track bar's holes

5.5mm

- and fasten with screws, then cover the holes with the provided caps 2 Ensure the rail bar has three holes per meter and secure each with screws to fix it firmly to the ceiling
- 3 Attach the end plug to the track bar, secure it with a screw, and fit the cover. This completes the installation of the track bar

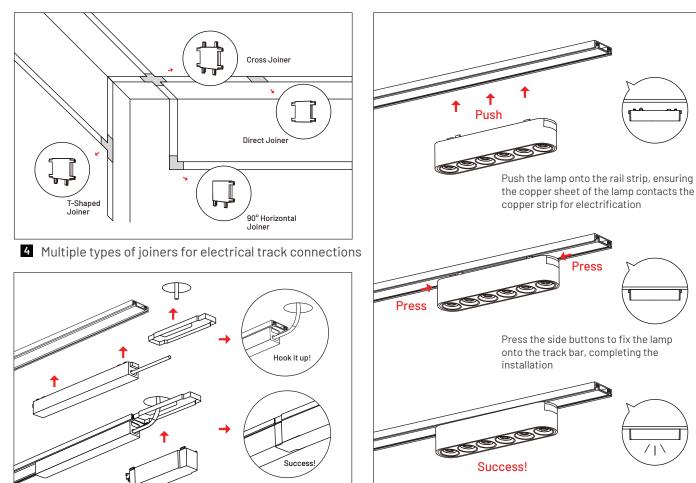

5 Install the built-in driver and cable storage box


Ģ

6 Installation of Ultra-Thin Magnetic Rail Lamp

# Linear Grille Lamp


48

MT-SUT23-GS6/12/18









### **Product Selection**

Model:	MT-SUT23-GS6	MT-SUT23-GS12	MT-SUT23-GS18
Power:	6W	12W	18W
Size:	L120 x W23 x H26	L235 x W23 x H26	L350 x W23 x H26
Colour Temperature:	3000K	4000K	
Trim Colour:	Black	White	
Dimming Option:	Non-Dim	DALI	0-10V



MAGNETIC TRACK (480) MT-SUT23-FG12/18 I




# Diffused Linear

MT-SUT23-FG12/18









### **Product Selection**


Model:	MT-SUT23-FG12	MT-SUT23-FG18	
Power:	12W	18W	
Size:	L235 x W23 x H26	L350 x W23 x H26	
Colour Temperature:	3000K	4000K	
Trim Colour:	Black	White	
Dimming Option:	Non-Dim	DALI	0-10V





**Track** Spotlight


MT-SUT23-T12/15/28



48







### **Product Selection**

Model:	MT-SUT23-T12	MT-SUT23-T15	MT-SUT23-T28
Power:	12W	15W	28W
Size:	Ø45 MM x 100 MM	Ø55 MM x 120 MM	Ø65 MM x 150 MM
Colour Temperature:	3000K	4000K	
Trim Colour:	Black	White	
Dimming Option:	Non-Dim	DALI	0-10V






# Adjustable **Dot Linear**

MT-SUT23-ZD6/12









### **Product Selection**

Model:	MT-SUT23-ZD6	MT-SUT23-ZD12	
Power:	6W	12W	
Size:	L120 x W23 x H75	L235 x W23 x H75	
Colour Temperature:	3000K	4000K	
Trim Colour:	Black	White	
Dimming Option:	Non-Dim	DALI	0-10V




# Surface Mount Downlight

(48V

MT-SUT23-D6







### **Product Selection**

Model:	MT-SUT23-D6		
Power:	6W		
Size:	Ø70 MM x 70 MM		
Colour Temperature:	3000K	4000K	
Trim Colour:	Black	White	
Dimming Option:	Non-Dim	DALI	0-10V

