

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

10 Watt / CRI 93 + / 890 lm



ABOUT

- Surface mounted adjustable COB fixed LED downlight designed with a sleek profile.
- Manufactured with aluminium body.
- Designed with no visible mounting screws providing a cleaner look.
- Ideal lighting solution for residential and commercial applications.
- Supplied with trailing driver.

Trim Colour

○ White / ● Black

Size

Ø80 mm x H110 mm

Wattage

10 W

Power Factor

> 0.90

Warranty

2 Years

Colour Temperature

3000K / 4000K / 5000K

Driver System

Lifud LED Driver

Luminous Flux

890 lm

Efficiency

88.92 lm/W

Warranty

2 Years

Dimming

Non-Dim

Beam Angle Selection

38°

Colour Rendering



Index 93+

LED Type

CREE CXA1507

PHOTOMETRIC

SRL610S / 10W / 38° / 3000K

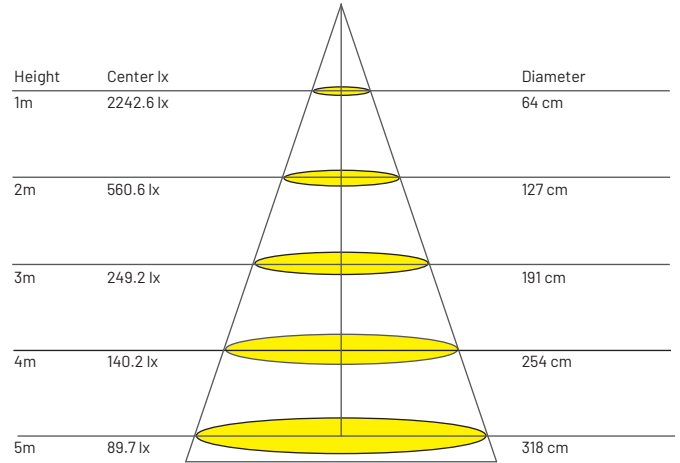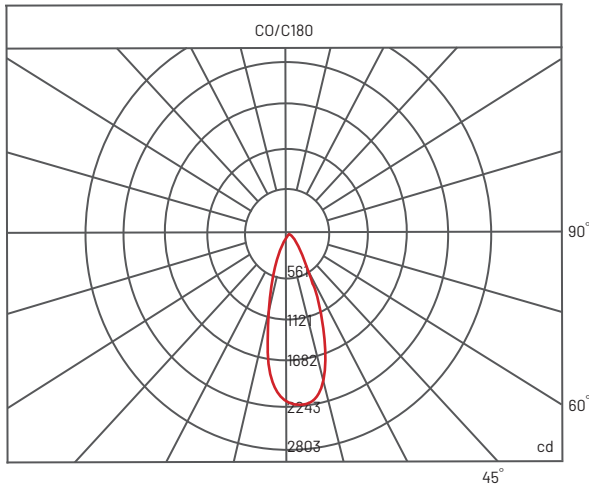

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL610S - BK - 3000K - 38° - NON - DIM]

CODE

TRIM COLOUR

CCT

BEAM ANGLE

DIMMING

SRL610S

BK

3000K

38°

NON-DIM

4000K

5000K