

ABOUT

- The brightness of individual backlit LEDs can be selected from 3000K, 4000K, and 5000K, providing consistent lighting for any space.
- The lighting has high colour rendering, producing vivid and clear illumination.

Wattage

1.5W

Size

48mm X 31mm

Beam Angle Selection

10° x 45°

Colour Temperature

3000K / 4000K / 5000K

Luminous Flux

180 lm/M

LED Type

SMD2835

Voltage

12

Efficiency

120 lm/W

Warranty

2 Years

IP Rating

65

Wire Length



106MM

SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

PHOTOMETRIC


BL-SLW-12 / 1.5W / 45° / 3000K

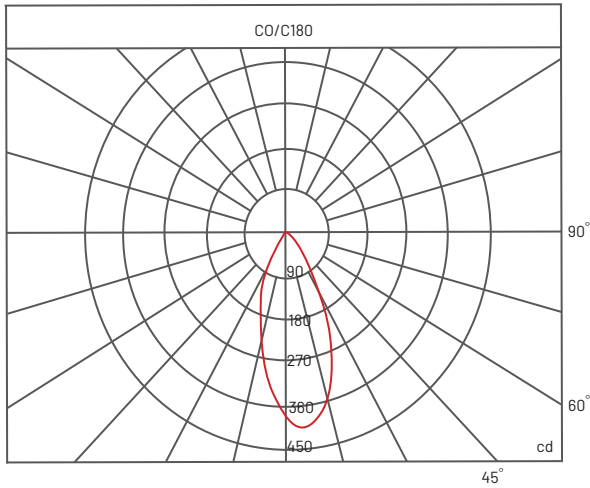

Lighting from left and right



Lighting from top and bottom



Lighting from top, bottom, left, and right

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. BL-SLW-12 - WH - 3000K - NON-DIM]

