

ABOUT

- Aluminum body with a matte powder coat finish
- Provides uninterrupted, dot-free lighting
- Ideal for offices, gyms, supermarkets, or spaces seeking a balance between aesthetics and functional lighting
- Two installation methods: can be suspended or mounted
- Convenient and simple installation, requiring only front pressure during installation
Requires a thin and small light-transmitting plate
- Compatible with most light transmitters on the market, capable of producing various light effects as required by customers

Luminaire Optic

The material and structure of diffuser provide uniform and shadow-free illumination

Material

Die-cast Aluminum Alloy
+ Diffused PMMA

Size

W54 mm x H75 mm

Luminous Efficacy

> 87 W/M

Voltage

100V ~ 240V

Warranty

2 Years

IP Rating

20

Dimming

Optional

Colour Renderin

> 90

Beam Angle Selection

110°

Ambient Temperatureg



25 °C

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL



HEXAGON-SHAPED SUSPENDED

SPECIFICATIONS

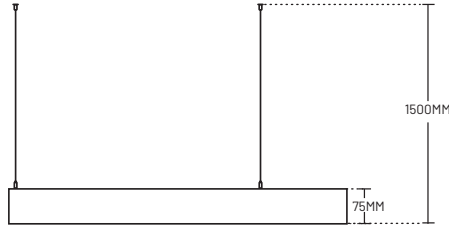



W640MM x D554MM x H75MM

Rated Power	45W
Trim Colour	○White / ●Black
Installation	Suspended
Colour Temperature	3000K / 4000K / 6000K

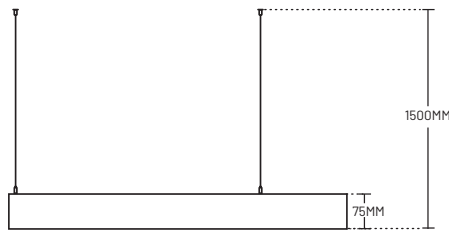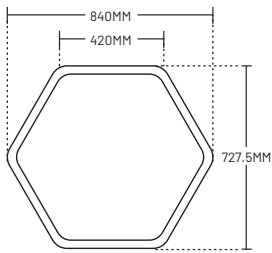



W840MM x D727.5MM x H75MM

Rated Power	60W
Trim Colour	○White / ●Black
Installation	Suspended
Colour Temperature	3000K / 4000K / 6000K

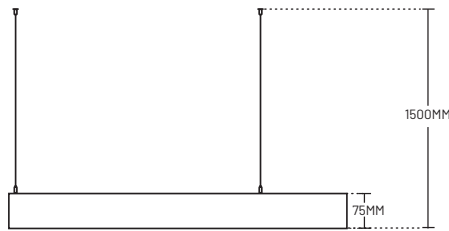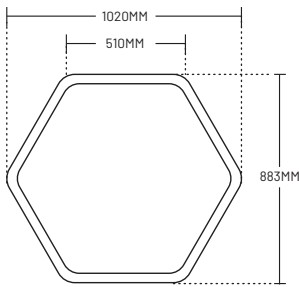



W1020MM x D883MM x H75MM

Rated Power	68W
Trim Colour	○White / ●Black
Installation	Suspended
Colour Temperature	3000K / 4000K / 6000K

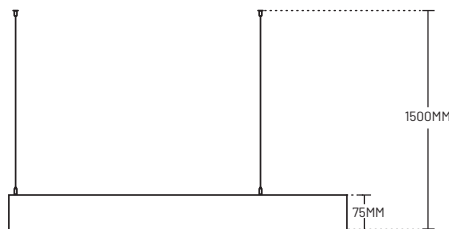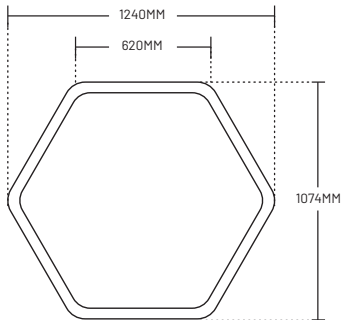

W1240MM x D1074MM x H75MM

Rated Power	90W
Trim Colour	○White / ●Black
Installation	Suspended
Colour Temperature	3000K / 4000K / 6000K

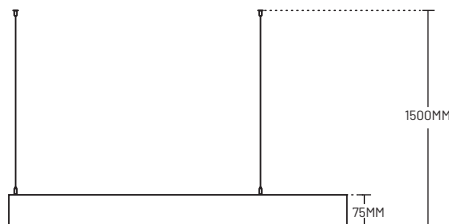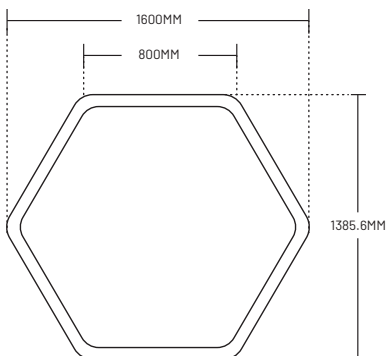

W1600MM x D1385.6MM x H75MM

Rated Power	115W
Trim Colour	○White / ●Black
Installation	Suspended
Colour Temperature	3000K / 4000K / 6000K