

ABOUT

- Aluminum body with a matte powder coat finish. Provides uninterrupted, dot-free lighting
- Ideal for offices, gyms, supermarkets, or spaces seeking a balance between aesthetics and functional lighting
- Three installation methods: can be suspended, surface mounted and recessed
- Convenient and simple installation, requiring only front pressure during installation
Requires a thin and small light-transmitting plate
- Compatible with most light transmitters on the market, capable of producing various light effects as required by customers

Luminaire Optic

The material and structure of diffuser provide uniform and shadow-free illumination

Material

6063 Aluminum
+ Diffused PMMA/PC

Size

W54 mm x H75 mm

Luminous Efficacy

> 87 W/M

Voltage

220V ~ 240V

Warranty

2 Years

IP Rating

20 / 40

Dimming

Optional

Colour Rendering

> 90

Beam Angle Selection

110°

Ambient Temperature


25 °C

SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

RING-SHAPED SUSPENDED

SPECIFICATIONS

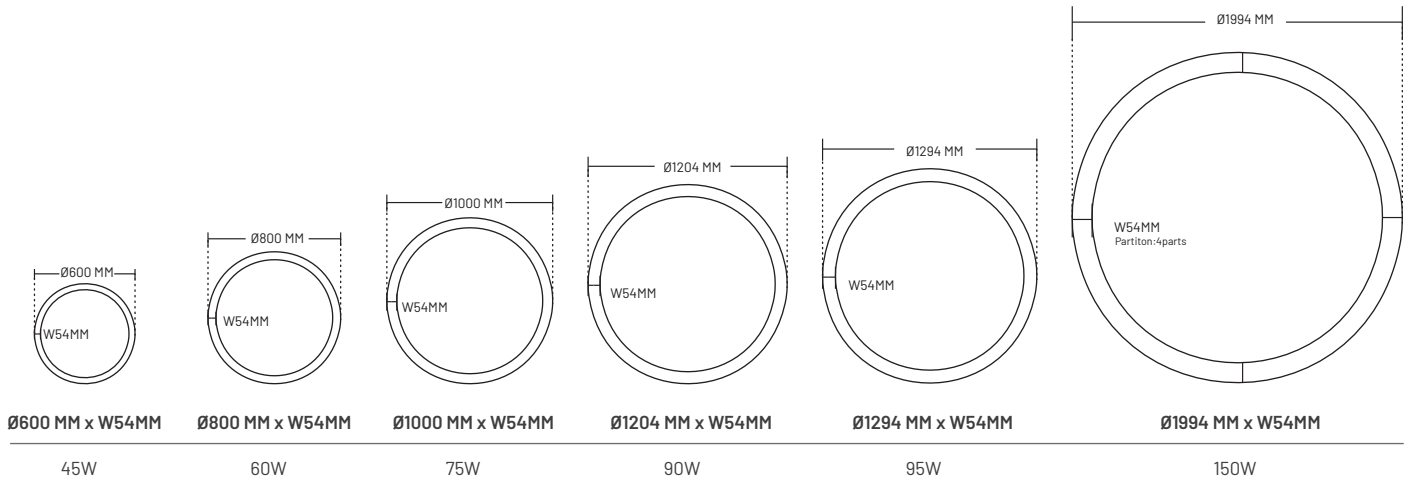

Trim Colour	○ White / ● Black
Colour Temperature	3000K / 4000K / 5000K / 6000K
Installation	Suspended / Recessed / Surface Mounted

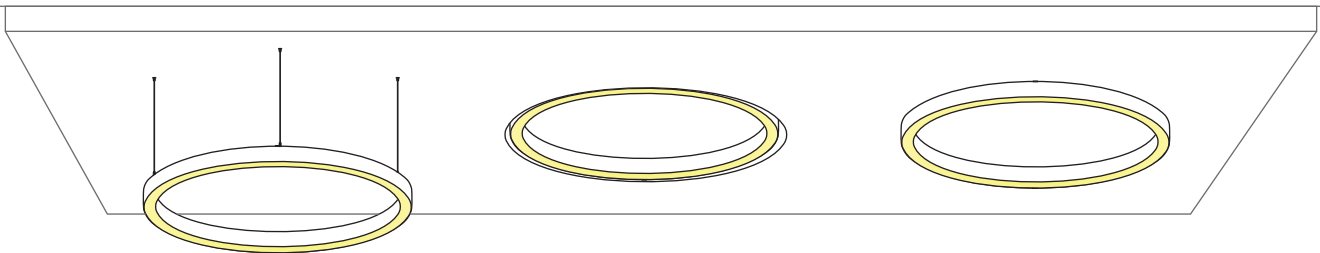

SPLICEABLE

