
SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

DOWNLIGHT SRL3528

28 Watt / CRI 93 + / 2520 lm





ABOUT

- Track mounted LED spotlight
- Aluminium body and matte powder coat finish
- Fully adjustable rotation and dimmable lighting
- Ideal for spaces with higher ceilings around 3.5 metres
- Utilised in retail and commercial projects which require clear illumination
- C-TICK and SAA Approved

Trim Colour	Colour Temperature	Dimming
OWhite /● Black	3000K / 4000K / 5000K	Optional
Light Size	Overall Size	Beam Angle Selection
Ø75 mm x H175 mm	H240 mm x L210 mm	38°
Wattage	Luminous Flux	Colour Rendering
28 W	2520 lm	Index 93+
Power Factor	Efficiency	LED Type
> 0.97	90 lm/W	CREE CXA1820
Driver System	IES	Warranty
Lifud LED Driver	Available	2 Years



SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


DOWNLIGHT SRL3528

28 Watt / CRI 93 + / 2520 lm

PHOTOMETRIC

SRL3528 / 28W / 24° / 3000K



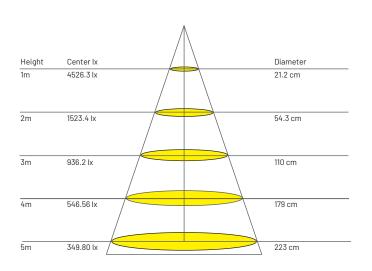

^{*}All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL3528 - WH - 3000K - 15° -DIM]

