



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

120LEDs/M / 180LEDs/M / 240LEDs/M
 CRI 90+ / 1200 ~ 1330 lm/M

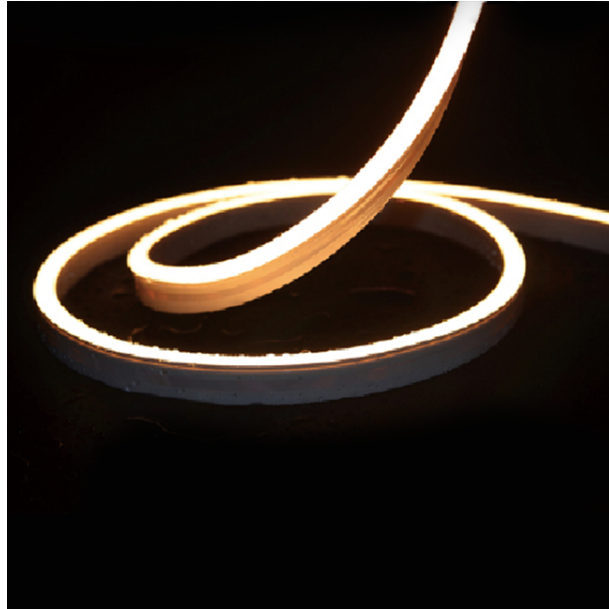

ABOUT

- Flexible LED Neon with sideways (left to right) bending profile.
- Various colour temperature and coloured options available.
- IP 67 waterproof and yellow-resistant.
- Cutting intervals of 20 to 25mm, which is the smallest cut interval on the market.
- Made to order to custom lengths.
- Can be paired with our extrusion: AE1018. This is a brighter option than our EL0612S, which is also suitable for joinery or shadowlines.

LED Quantity & Rated Power

120LEDs/M - 9.6W/M / 180LEDs/M - 12.6W/M / 180LEDs/M - 13W/M / 240LEDs/M - 15W/M

Maximum Length

10M

Size

10mm X 18mm

Input Voltage

12V / 24V

Colour Temperature

2700K / 3000K / 4000K / 5000K / CCT

PCB Width

10mm

Beam Angle Selection

120°

Cutting Increment

25mm

Luminous Flux

1200 ~ 1330 lm/M

LED Type

SMD2835

Colour Rendering

Index 90+

IP Rating

65

Warranty


2 Years

SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

120LEDs/M / 180LEDs/M / 240LEDs/M
 CRI 90 + / 1200 ~ 1330 lm/M


BEND MANUAL




Lighting Profile

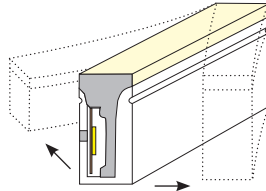


Bending Direction




Bend Radius



Bend Radius



Aluminium Profile



Flexible Aluminium Profile

PRODUCT ORDER CODE

[E.G. EL1018S - 12V - 3000K - 120LEDs/M 9.6W/M - NON-DIM]

