


**SPECIFICATION SHEET**

AUSTRALIA / INTERNATIONAL

120LEDs/M / 180LEDs/M / 240LEDs/M  
CRI 90 + / 1200 ~ 1330 lm

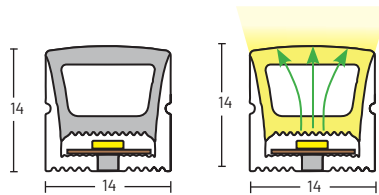

**ABOUT**

- Flexible LED Neon with up and down bending profile.
- Various colour temperature and coloured options available.
- IP 67 waterproof and yellow-resistant.
- Cutting intervals of 20 to 25mm, which is the smallest cut interval on the market.
- Made to order to custom lengths.
- Can be paired with our extrusion: AE1414

**LED Quantity & Rated Power**

120LEDs/M - 9.6W/M / 180LEDs/M - 12.6W/M / 180LEDs/M - 13W/M / 240LEDs/M - 15W/M

**Maximum Length**

10M

**Size**

14mm X 14mm

**Input Voltage**

12V / 24V

**Colour Temperature**

2700K / 3000K / 4000K / 5000K / CCT

**PCB Width**

10mm

**Beam Angle Selection**

120°

**Cutting Increment**

25mm

**Luminous Flux**

1200 ~ 1330 lm/M

**LED Type**

SMD2835

**Colour Rendering**

Index 90+

**IP Rating**

65

**Warranty**


2 Years

## SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL

120LEDs/M / 180LEDs/M / 240LEDs/M  
 CRI 90 + / 1200 ~ 1330 lm


### BEND MANUAL




Lighting Profile




Bending Direction





Bend Radius




Bend Radius



Aluminium Profile



Flexible Aluminium Profile



### PRODUCT ORDER CODE

[ E.G. EL1414F - 12V - 3000K - 120LEDs/M 9.6W/M - NON-DIM ]

