

**ABOUT**

- Crafted from high-quality acrylic panels, combined with aluminium body.
- Even light distribution
- Flexible installation methods: Suspended, Surface mounted or Recessed.
- It can achieve both upward and downward lighting or dual-colour temperature options, offering flexibility for various scenarios.
- Timeless circular form complements a wide range of spaces, including shopping centres, offices, schools, hospitals, libraries, supermarkets, and hotels.
- Lead Time: Please enquire with our Team

**Luminaire Optic**

The light source is equipped with lenses that use refraction and diffusion principles to broaden the range of light distribution.

**Lighting Distribution**



**Material**

Aluminium  
+ Diffused PMMA/PC

**Size**

Flush: ( Ø480mm | Ø600mm | Ø900mm | Ø1200mm ) x H75 mm  
Indented: ( Ø600mm | Ø800mm | Ø1000mm ) x H105 mm

**Luminous Efficacy**

> 140 LM/W

**Voltage**

220V ~ 240V

**Colour Rendering**

> 90

**Product Warranty**

2 Years

**IP Rating**

20 or 40


**Dimming**

Optional

**SPECIFICATION SHEET**  
 AUSTRALIA / INTERNATIONAL

**KD-C075 - FLUSH LAMPSHADE**

<b>Ø480 x H75MM</b>	<b>Ø600 x H75MM</b>	<b>Ø900 x H75MM</b>	<b>Ø1200 x H75MM</b>
12W / 240lm (light-up)	16W / 320lm (light-up)	25W / 500lm (light-up)	35W / 700lm (light-up)
45W / 4500lm (light-down)	54W / 5400lm (light-down)	90W / 9000lm (light-down)	150W / 15000lm (light-down)
Trim Colour		○White / ● Black	
Colour Temperature		3000K / 3500K / 4000K / 6000K	
Installation		Suspended ( SK:1500MM ) / Recessed / Surface Mounted	

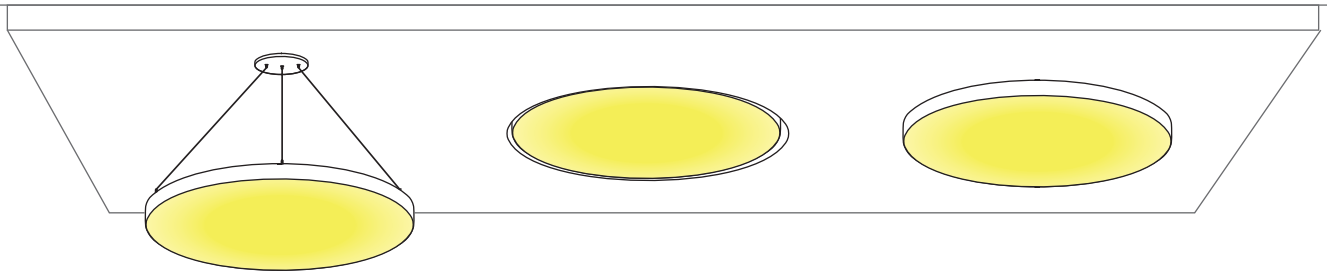

**KD-C105 - INDENTED LAMPSHADE WITH INTERNAL RIM**

<b>Ø600 x H105MM</b>	<b>Ø800 x H105MM</b>	<b>Ø1000 x H105MM</b>
40W / 4000lm (Single LED)	60W / 5400lm (Single LED)	100W / 10000lm (Single LED)
70W / 9800lm (Double LED)	100W / 14000lm (Double LED)	150W / 21000lm (Double LED)
Trim Colour		○White / ● Black
Colour Temperature		3000K / 3500K / 4000K / 6000K
Installation		Suspended ( SK:1500MM ) / Recessed / Surface Mounted

