


LED STRIP LIGHT SL24168-CCT

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

24 Voltage / 168LEDs/M - 12W/M
CRI 90 + / 980 ~ 1050 lm
(6mm | 8mm)

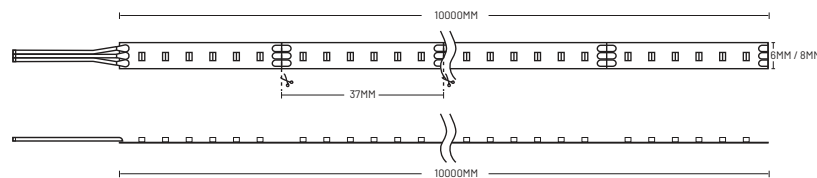

ABOUT

- Flexible LED CCT striplight with close pitch of 168 LEDs per metre for reduced spotting effect
- Adjustable colour temperature range from warm white to cool white (2700K - 6500K).
- Available in reels up to 10 metres with cutting intervals of 37mm, which is the smallest cut interval on the market for 24V
- Even illumination with no dark areas at the ends.
- Can be paired with a variety of extrusion profiles to suit any interior scheme
- Ideal for high-end application C-TICK and SAA Approved.
- Must be paired with controller (MSLC-035) and a remote to turn the colour
- Compatible with DALI system, 1-10V system

LED Quantity

168 leds/m

Colour Temperature

2700K - 6500K

Standard Length

10 M

Size

1.5mm X (6mm | 8mm)

Beam Angle Selection

120°

Input Voltage

24V

Luminous Flux

980~1050 lm/M

Dimming

Optional

IP Rating

20

Rated Power

12 W/M

LED Type

SMD2835

Colour Rendering

Index 90+

Warranty

2 Years