


SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

13 Watt / CRI 93 + / 1125 lm



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Subtle interest in design, with ability to be pulled out and rotated
- Offering both accent and general lighting with 360degree rotation and 90 degree tilt.
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø90 mm

Size

Ø103 mm x H113 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

13 W

Luminous Flux

1125 lm

Colour Rendering

Index 93+

Power Factor

> 0.97

Efficiency

86.53 lm/W

LED Type

CREE CXA1512

Driver System

Lifud LED Driver

IES

Available

Warranty

2 Years



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

13 Watt / CRI 93 + / 1125 lm

PHOTOMETRIC

SRL1615 / 13W / 24° / 3000K

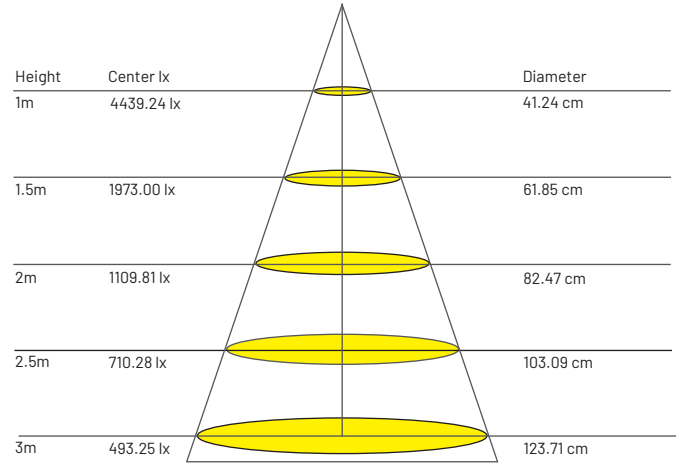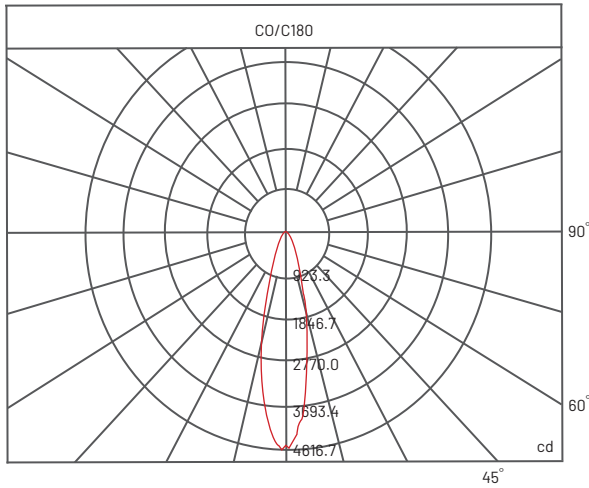

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1615 - WH - 3000K - 15° - DIM]

