


SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL



ABOUT

- Recessed downlight
- Aluminium body and matte powder coat finish
- 10 deep set optics ensures discrete profile and minimal glare
- Ideal for both general and accent lighting within residential and commercial projects
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K

Dimming

Non-Dimming

Cut-Out Size

Ø270 mm x W35 mm

Size

Ø280 mm x W47 mm x H55 mm

Beam Angle Selection

24°

Wattage

20 W

Luminous Flux

1700 lm

Colour Rendering

Index 90+

Power Factor

> 0.93

Efficiency

85.3 lm/W

LED Type

CREE XP-G2

Driver System

EAGL CRISE
 30V/600MA

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL-UD10N / 20W / 24° / 3000K

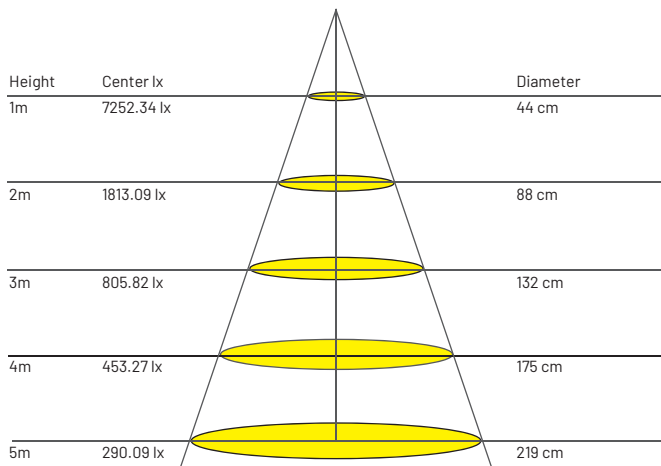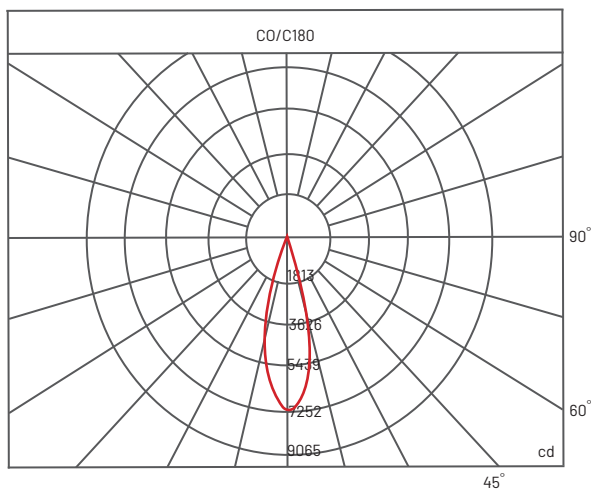

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL-UD10N - WH - 3000K - 24° -NON-DIM]

