


**SPECIFICATION SHEET**

AUSTRALIA / INTERNATIONAL



**ABOUT**

- Recessed downlight
- Aluminium body and matte powder coat finish
- 10 deep set optics ensures discrete profile and minimal glare
- Ideal for both general and accent lighting within residential and commercial projects
- C-TICK and SAA Approved

**Trim Colour**

○ White / ● Black

**Colour Temperature**

3000K / 4000K

**Dimming**

Non-Dimming

**Cut-Out Size**

Ø270 mm x W35 mm

**Size**

Ø280 mm x W47 mm x H55 mm

**Beam Angle Selection**

24°

**Wattage**

20 W

**Luminous Flux**

1700 lm

**Colour Rendering**

Index 90+

**Power Factor**

> 0.93

**Efficiency**

85.3 lm/W

**LED Type**

CREE XP-G2

**Driver System**

EAGL CRISE  
 30V/600MA

**IES**



Available

**Warranty**

2 Years

**PHOTOMETRIC**

SRL-UD10N / 20W / 24° / 3000K

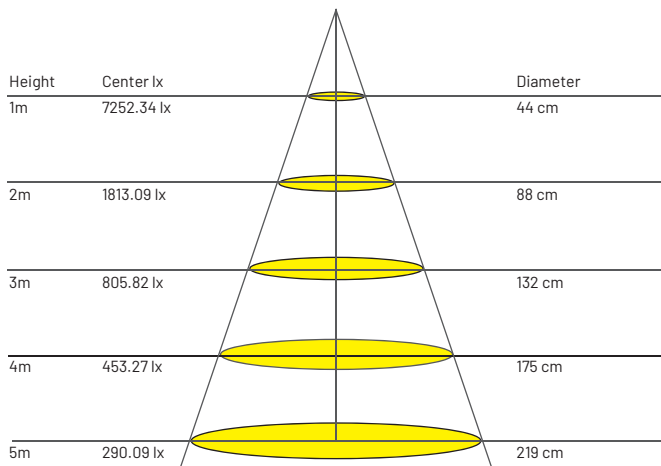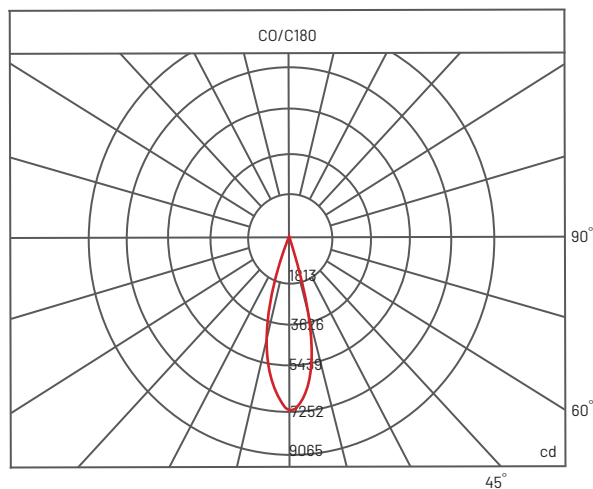

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

[ E.G. SRL-UD10N - WH - 3000K - 24° -NON-DIM ]

