



### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Wider beam angle to accommodate high traffic areas  
Ideal for back of house in hospitality, or projects requiring efficient luminosity
- C-TICK and SAA Approved

#### Trim Colour

○ White / ● Black

#### Colour Temperature

CCT Changeable  
( 3000K / 4000K / 6000K )

#### Dimming

Optional

#### Cut-Out Size

Ø90 mm

#### Size

Ø105 mm x H70 mm

#### Beam Angle Selection

60°

#### Wattage

12 W

#### Luminous Flux

960 lm

#### Colour Rendering

Index 90+

#### Power Factor

> 0.92

#### Warranty

2 Years

#### LED Type

OSRAM 3030

#### Driver System



Lifud LED Driver

#### IES

Available

**PHOTOMETRIC**

SRL2212 / 12W / 90°

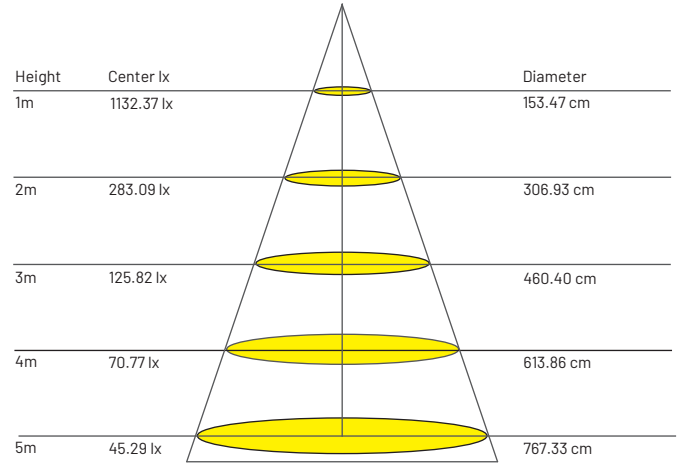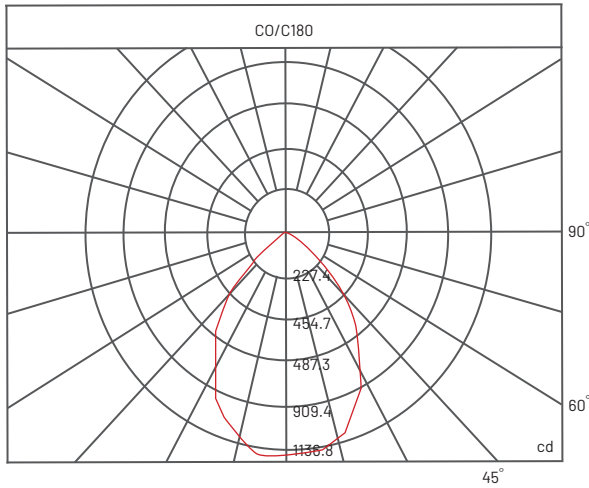

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

[ E.G. SRL2212 - WH - CCT CHANGEABLE - 60° - NON-DIM ]

