



## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

15 Watt / CRI 93 + / 1330 lm



### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 30 degrees in one direction
- Designed to put the focus on key areas
- Ideal for high-end application
- C-TICK and SAA Approved

#### Trim Colour

○ White / ● Black

#### Colour Temperature

3000K / 4000K / 5000K

#### Dimming

Optional

#### Cut-Out Size

Ø92 mm

#### Size

Ø105 mm x H100 mm

#### Beam Angle Selection

15° / 24° / 38°

#### Wattage

15 W

#### Luminous Flux

1330 lm

#### Colour Rendering

Index 93+

#### Power Factor

> 0.90

#### Efficiency

88.8 lm/W

#### LED Type

CREE CXA1512

#### Driver System

Lifud LED Driver

#### IES

Available

#### Warranty

2 Years



**SPECIFICATION SHEET**

AUSTRALIA / INTERNATIONAL

15 Watt / CRI 93 + / 1330 lm

**PHOTOMETRIC**

SRL115 / 15W / 38° / 3000K

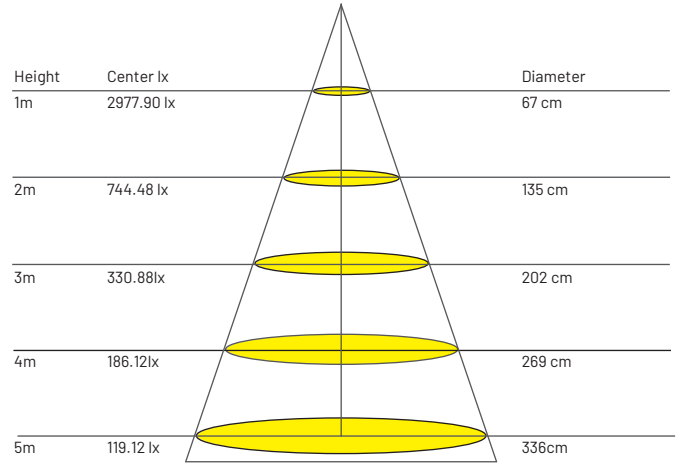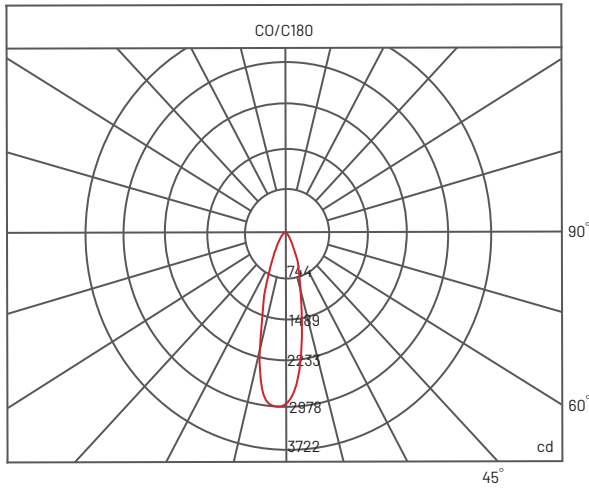

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

**PRODUCT ORDER CODE**

