



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Wider beam angle to accommodate high traffic areas
Ideal for back of house in hospitality, or projects requiring efficient luminosity
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Cut-Out Size

Ø90 mm

Wattage

12 W

Power Factor

> 0.92

Driver System

Lifud LED Driver

Colour Temperature

CCT Changeable
(3000K / 4000K / 6000K)

Size

Ø105 mm x H70 mm

Luminous Flux

960 lm

Warranty

2 Years

IES

Available

Dimming

Optional

Beam Angle Selection

60°

Colour Rendering



Index 90+

LED Type

OSRAM 3030

PHOTOMETRIC

SRL2212 / 12W / 60°

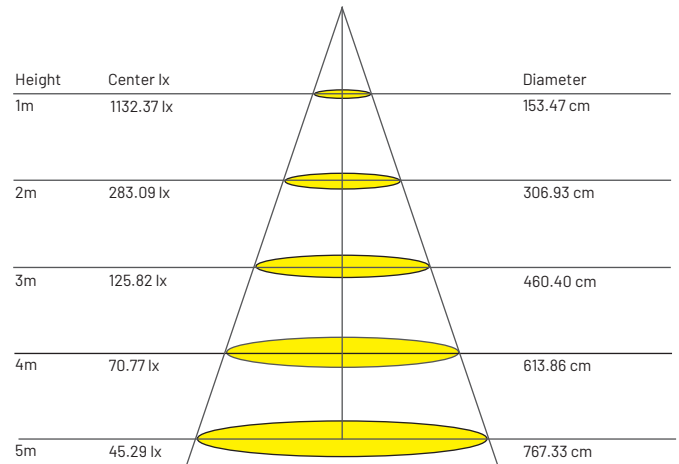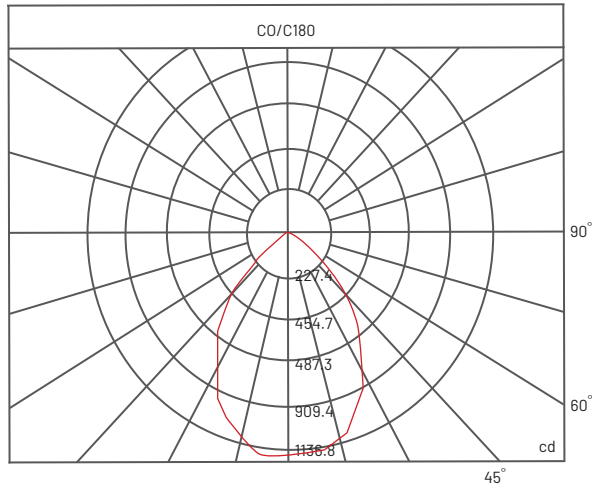

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL2212 - WH - CCT CHANGEABLE - 60° - NON-DIM]

