



SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

SURFACE MOUNT SRL633N

33 Watt / CRI 93 + / 3960 lm





ABOUT

- Surface mounted COB LED downlight featuring a streamlined low-profile design.
- Constructed with durable aluminium housing for superior heat management.
- Engineered with concealed screw fixings for a seamless, minimalist appearance.
- Perfect for both residential and commercial spaces, it delivers clean, modern illumination. Includes an integrated trailing driver for easy installation and compatibility.

Trim Colour	Colour Temperature	Dimming
OWhite / ● Black	3000K / 4000K	Dim / Non-Dim
Size	IES	Beam Angle Selection
Ø140 mm x H160 mm	Available	38°
Wattage	Luminous Flux	Colour Rendering
33 W	3960 lm	Index 93+
Power Factor	Efficiency	LED Type
> 0.90	109 lm/W	CREE/CMB1818
Driver System	Warranty	IP Rating
Eaglerise LED Driver	2 Years	20



SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


SURFACE MOUNT SRL633N

33 Watt / CRI 93 + / 3960 lm

PHOTOMETRIC

SRL633N / 33W / 38° / 3000K



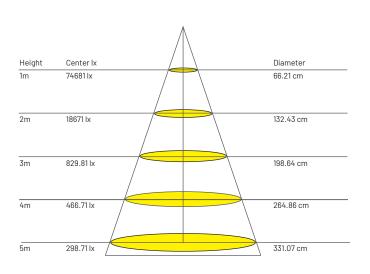

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL633N - WH - 3000K - 38° - DIM]

