

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

DOWNLIGHT SRL1620

20 Watt / CRI 93 + / 2000 lm











ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Subtle interest in design, with ability to be pulled out and rotated
- Offering both accent and general lighting with 360degree rotation and 90 degree tilt.
- C-TICK and SAA Approved

Trim Colour	Colour Temperature	Dimming
OWhite / ● Black	3000K / 4000K	Optional
Cut-Out Size	Size	Beam Angle Selection
Ø120 mm	Ø130 mm x H135 mm	24° / 36°
Wattage	Luminous Flux	Colour Rendering
20 W	2000 lm	Index 93+
Power Factor	Efficiency	LED Type
> 0.90	116.18 lm/W	CREE / CMB1510
Driver System	IES	Warranty
Lifud LED Driver	Available	2 Years



SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


DOWNLIGHT SRL1620

20 Watt / CRI 93 + / 2000 lm

PHOTOMETRIC

SRL1620 / 20W / 24° / 3000K



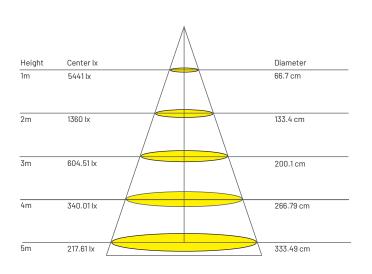

^{*}All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1620 - WH - 3000K - 24° -DIM]

