

ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour

○

White
/

●

Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø120 mm

Size

Ø130 mm x H108 mm

Beam Angle Selection

24° / 36°

Wattage

25 W

Luminous Flux

2500 lm

Colour Rendering

Index 90+

Power Factor

> 0.9

Efficiency

117.89 lm/W

LED Type

CREE / CMB1818

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL825 / 25W / 36° / 3000K

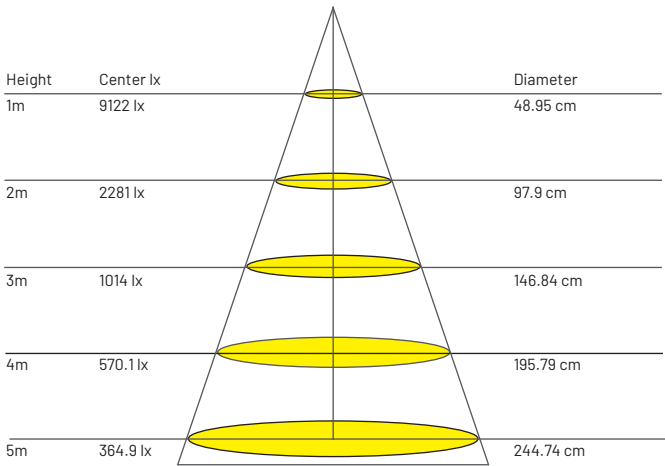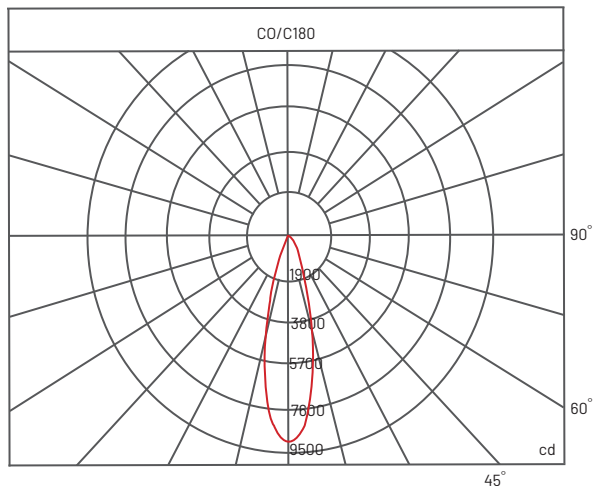

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[ E.G. SRL825 - WH - 3000K - 36° -DIM ]

CODE

TRIM COLOUR

CCT

BEAM ANGLE

DIMMING

SRL825

WH

3000K

24°

DIM

BK

4000K

36°

NON-DIM

5000K