

### ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

#### Trim Colour

○White / ● Black

#### Colour Temperature

3000K / 4000K / 5000K

#### Dimming

Optional

#### Cut-Out Size

Ø120 mm

#### Size

Ø130 mm x H108 mm

#### Beam Angle Selection

24° / 36°

#### Wattage

25 W

#### Luminous Flux

2500 lm

#### Colour Rendering

Index 90+

#### Power Factor

> 0.9

#### Efficiency

117.89 lm/W

#### LED Type

CREE / CMB1818

#### Driver System

Lifud LED Driver

#### IES



Available

#### Warranty

2 Years

PHOTOMETRIC

SRL825 / 25W / 36° / 3000K

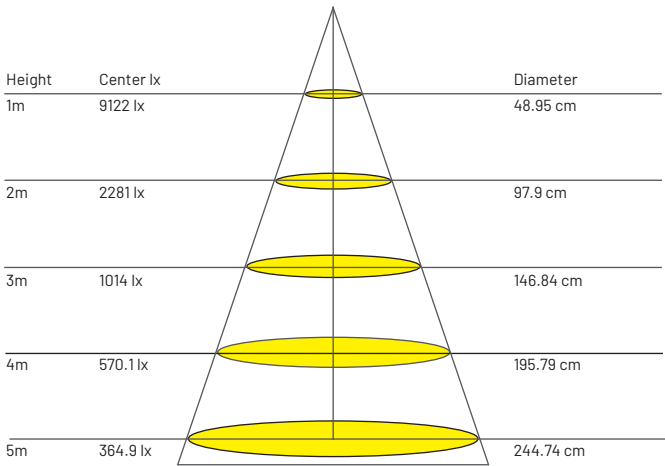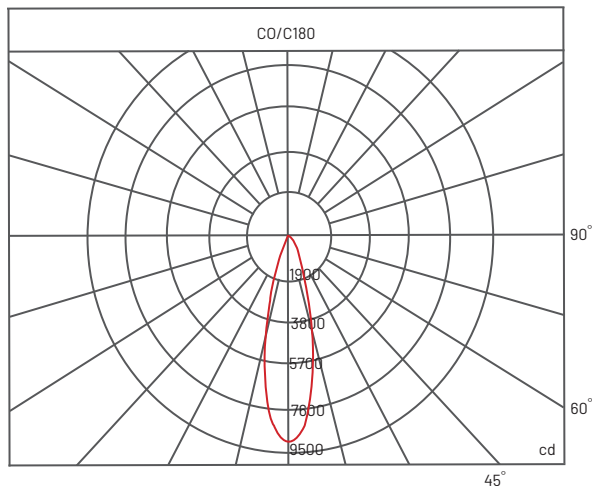

\*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[ E.G. SRL825 - WH - 3000K - 36° -DIM ]

CODE

TRIM COLOUR

CCT

BEAM ANGLE

DIMMING

SRL825

WH

3000K

24°

DIM

BK

4000K

36°

NON-DIM

5000K