

SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

DOWNLIGHT SRL1502

2 Watt / CRI 90 + / 210 lm









ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Small and minimal in design Niche lighting for contemporary or decorative settings
- C-TICK and SAA Approved

Trim Colour	Colour Temperature	Dimming
OWhite / ● Black	3000K	No
Cut-Out Size	Size	Beam Angle Selection
Ø28 mm	Ø38 mm x H38 mm	24°
Wattage	Luminous Flux	Colour Rendering
2 W	210 lm	Index 90+
Power Factor	Efficiency	LED Type
> 0.90	105 lm/W	CREE XP-G2
Driver System	IES	Warranty
Lifud LED Driver	Available	2 Years



SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


DOWNLIGHT SRL1502

2 Watt / CRI 90 + / 210 lm

PHOTOMETRIC

SRL1502 / 2W / 24° / 3000K



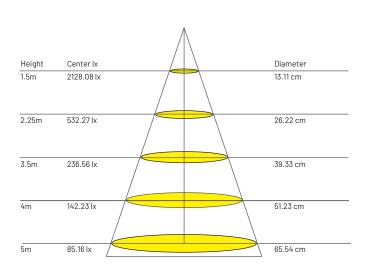

^{*}All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1502 - WH - 3000K - 24° - NON-DIM]

