

ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour

○White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Cut-Out Size

Ø120 mm

Size

Ø140 mm x H65 mm

Beam Angle Selection

38°

Wattage

20 W

Luminous Flux

2100 lm

Colour Rendering

Index 93+

Power Factor

> 0.97

Efficiency

90 lm/W

LED Type

CREE CMB1507

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL1520S / 20W / 38° / 3000K

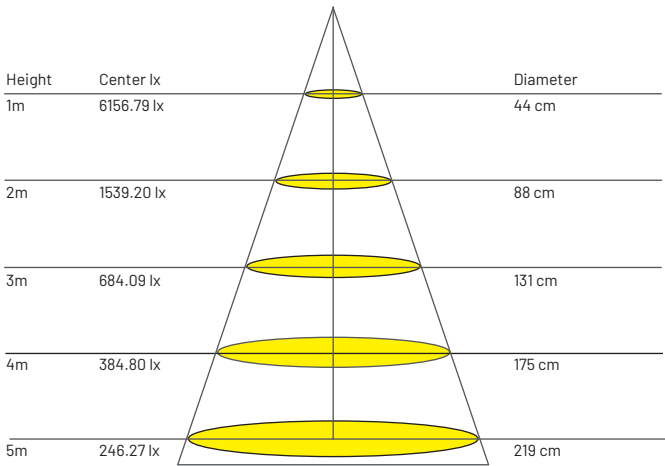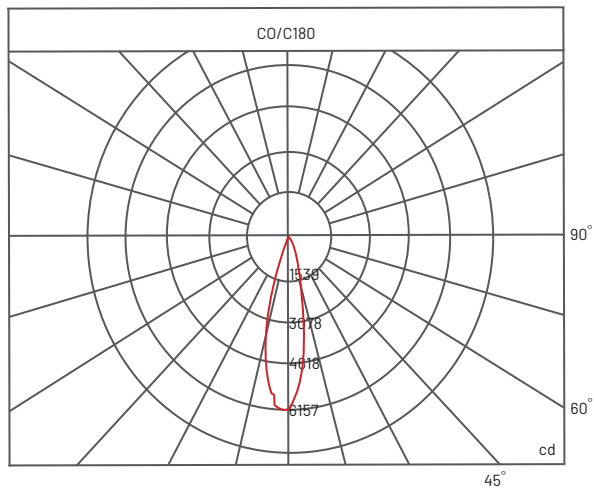

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1520S - WH - 3000K - 38° -DIM]

CODE

TRIM COLOUR

CCT

BEAM ANGLE

DIMMING

SRL1520S

WH

3000K

38°

DIM

BK

4000K

5000K

NON-DIM