



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour ○ White / ● Black	Colour Temperature 3000K / 4000K / 5000K	Dimming Optional
Cut-Out Size Ø120 mm	Size Ø140 mm x H65 mm	Beam Angle Selection 38°
Wattage 20 W	Luminous Flux 2100 lm	Colour Rendering Index 93+
Power Factor > 0.97	Efficiency 90 lm/W	LED Type CREE CMB1507
Driver System Lifud LED Driver	IES Available	Warranty 2 Years

PHOTOMETRIC

SRL1520S / 20W / 38° / 3000K

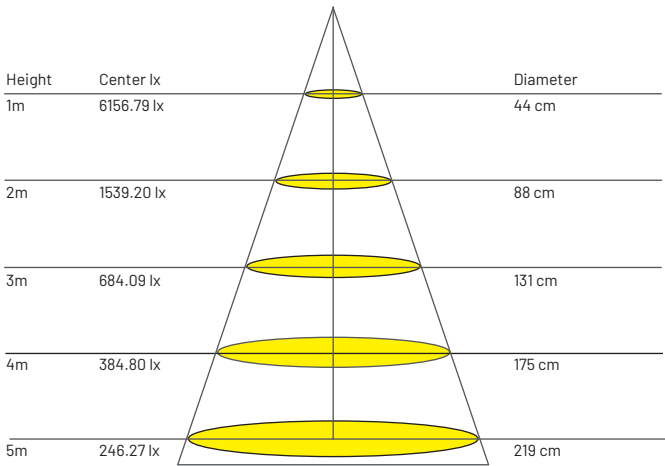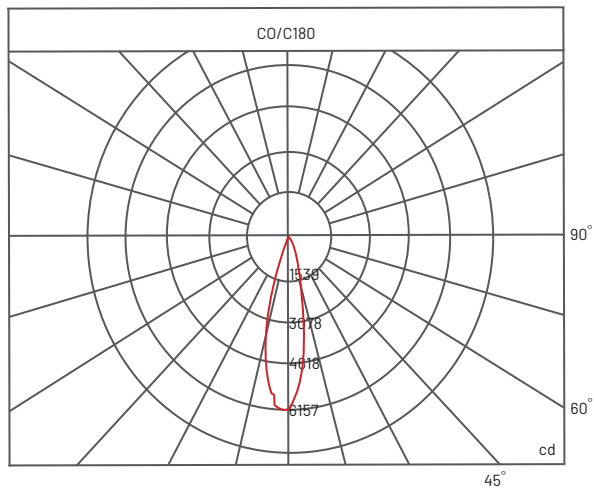

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1520S - WH - 3000K - 38° -DIM]

CODE

TRIM COLOUR

CCT

BEAM ANGLE

DIMMING

SRL1520S

WH

3000K

38°

DIM

BK

4000K

5000K

NON-DIM