



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Versatile all-rounder with a low glare, and tiltable up to 15 degrees
- Ideal for general lighting in residential, retail and commercial projects
- C-TICK and SAA Approved

Trim Colour ○ White ● Black	Colour Temperature 3000K / 4000K	Dimming Optional
Cut-Out Size Ø75 mm	Size Ø82 mm x H130 mm	Beam Angle Selection 24° / 36°
Wattage 12 W	Luminous Flux 1200 lm	Colour Rendering Index 93+
Power Factor > 0.9	Efficiency 100 lm/W	LED Type CREE / CMB1507
Driver System Lifud LED Driver	IES Available	Warranty 2 Years

PHOTOMETRIC

SRL1612A / 12W / 24° / 3000K

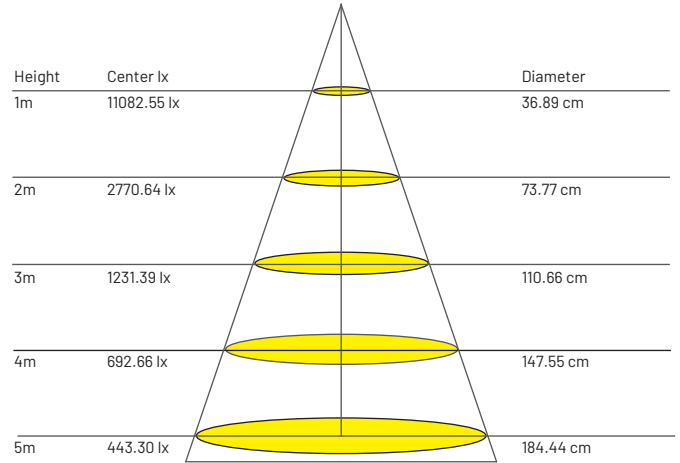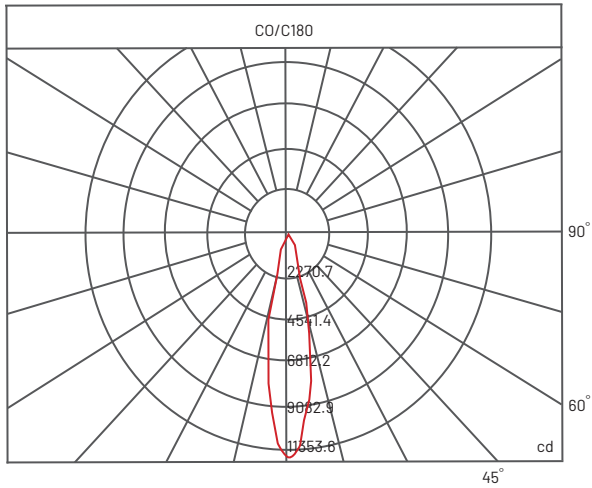

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL1612A - WH - 3000K - 24° - DIM]

