
SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

SURFACE MOUNT SRL3515S

15 Watt / CRI 90 + / 1500 lm





ABOUT

- Mounted LED spotlight
- Aluminium body and matte powder coat finish
- Fully adjustable rotation and dimmable lighting
- Ideal for spaces with higher ceilings around 3.5 metres
- Widely used in hospitality and retail projects
- C-TICK and SAA Approved

Tilli ooloui	ooloui remperature	Dillilling
OWhite / ● Black	3000K / 4000K	Dimmable
Light Size	Overall Size	Beam Angle Selection
Ø63 mm x H140 mm	Ø72 mm x H220 mm Ø72 mm x H40 mm (Base)	24° / 36°
Wattage	Luminous Flux	Colour Rendering
15 W	1500 lm	Index 90+
Power Factor	Efficiency	LED Type
> 0.9	110.19 lm/W	CREE / CMB1507
Driver System	IES	Warranty
Lifud LED Driver	Available	2 Years

Colour Temperature

Dimmina

Trim Colour



SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


SURFACE MOUNT SRL3515S

15 Watt / CRI 90 + / 1500 lm

PHOTOMETRIC

SRL3515S / 15W / 24° / 3000K



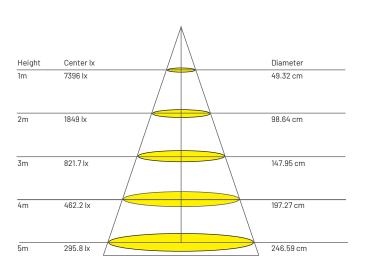

^{*}All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL3515S - WH - 3000K - 24° -DIM]

