
## SPECIFICATION SHEET

AUSTRALIA / INTERNATIONAL

# SURFACE MOUNT SRL3515S

15 Watt / CRI 90 + / 1500 lm





Trim Colour

### ABOUT

- Mounted LED spotlight
- Aluminium body and matte powder coat finish
- Fully adjustable rotation and dimmable lighting
- Ideal for spaces with higher ceilings around 3.5 metres
- Widely used in hospitality and retail projects
- C-TICK and SAA Approved

Difficulty	ooloal remperature	Triiii ooloui
immable	3000K / 4000K	OWhite / ● Black
eam Angle Selection	Overall Size	Light Size
4° / 36°	Ø72 mm x H220 mm Ø72 mm x H40 mm(Base)	Ø63 mm x H140 mm
olour Rendering	Luminous Flux	Wattage
ndex 90+	1500 lm	15 W
ED Type	Efficiency	Power Factor
REE / CMB1507	110.19 lm/W	> 0.9
<b>V</b> arranty	IES	Driver System
Years	Available	Lifud LED Driver
	Available	Lifud LED Driver

Colour Temperature

Dimming



#### SPECIFICATION SHEET


AUSTRALIA / INTERNATIONAL


# SURFACE MOUNT SRL3515S

15 Watt / CRI 90 + / 1500 lm

#### **PHOTOMETRIC**

SRL3515S / 15W / 24° / 3000K



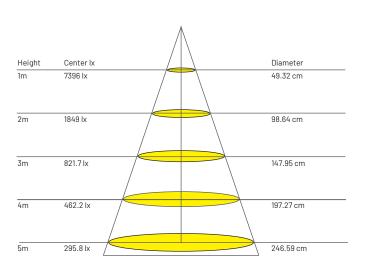

<sup>\*</sup>All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

#### PRODUCT ORDER CODE

[ E.G. SRL3515S - WH - 3000K - 24° -DIM ]

