





ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 15 degrees in all direction
- Designed to put the focus on key areas
- Ideal for high-end application
- C-TICK and SAA Approved

Trim Colour ○ White ● Black	Colour Temperature 2700K / 3000K / 4000K / 5000K	Dimming Optional
Cut-Out Size Ø93 mm	Size Ø103 mm x H88 mm	Beam Angle Selection 15° / 24° / 38°
Wattage 15 W	Luminous Flux 1355 lm	Colour Rendering Index 93+
Power Factor > 0.90	Efficiency 90.3 lm/W	LED Type CREE CMB1306
Driver System Lifud LED Driver	IES Available	Warranty 2 Years

PHOTOMETRIC

SRL2615 / 15W / 24° / 3000K

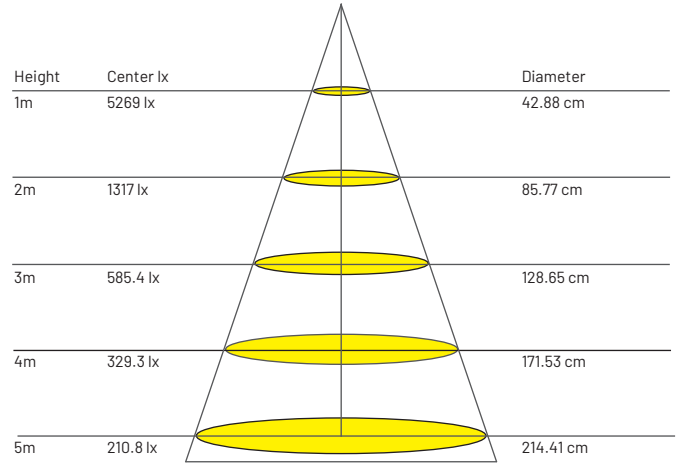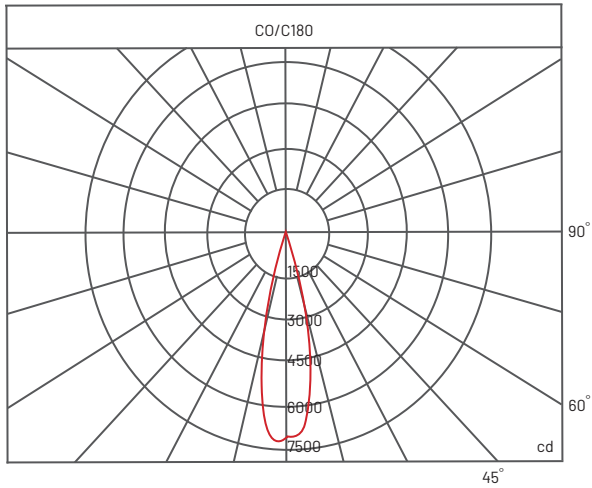

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL2615 - WH - 3000K - 24° - DIM]

