



ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Tiltable up to 15 degrees in all direction
- Designed to put the focus on key areas
- Ideal for high-end application
- C-TICK and SAA Approved

Trim Colour

○

White

/

●

Black

Cut-Out Size

Ø93 mm

Wattage

15 W

Power Factor

> 0.90

Driver System

Lifud LED Driver

Colour Temperature

2700K / 3000K / 4000K / 5000K

Size

Ø103 mm x H88 mm

Luminous Flux

1355 lm

Efficiency

90.3 lm/W

IES

Available

Dimming

Optional

Beam Angle Selection

15° / 24° / 38°

Colour Rendering

Index 93+

LED Type



CREE CMB1306

Warranty

2 Years

PHOTOMETRIC

SRL2615 / 15W / 24° / 3000K

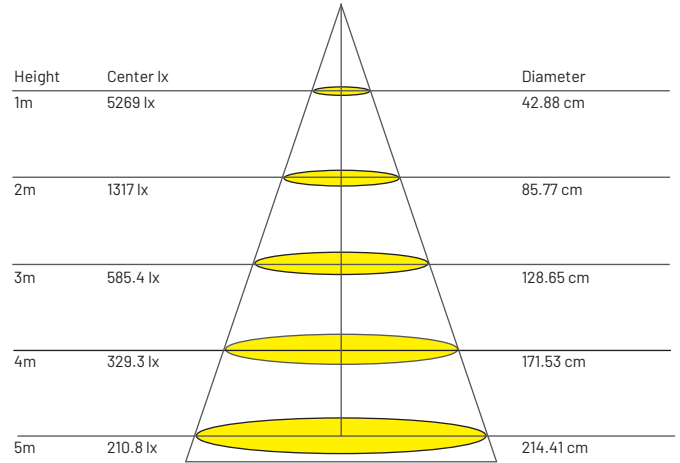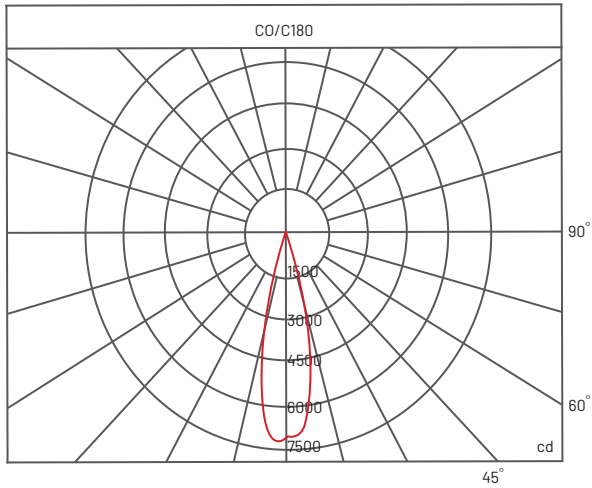

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL2615 - WH - 3000K - 24° - DIM]

