

ABOUT

- Semi - Recessed LED downlight
- Aluminium body and matte powder coat finish
- Small and versatile, suitable for cabinets and niche areas
- Ideal for areas that require minimalistic appeal
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K

Dimming

Optional

Cut-Out Size

Ø65 mm

Size

Ø86 mm x H65 mm

Beam Angle Selection

24°

Wattage

10 W

Luminous Flux

810.75 lm

Colour Rendering

Index 93+

Power Factor

> 0.90

Efficiency

81.1 lm/W

LED Type

CREE CXA1507

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL706 / 10W / 24° / 3000K

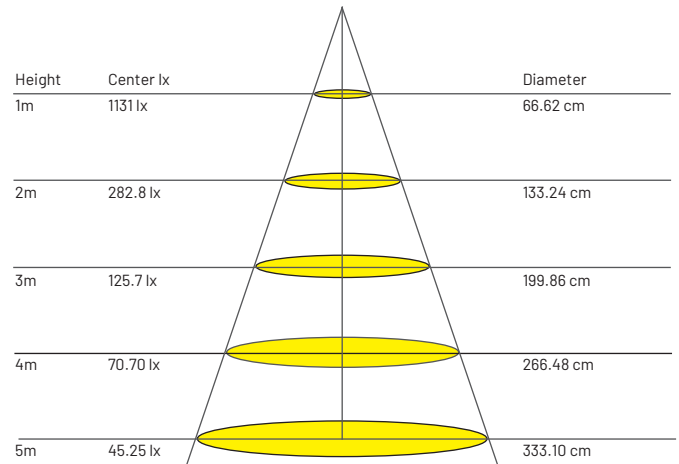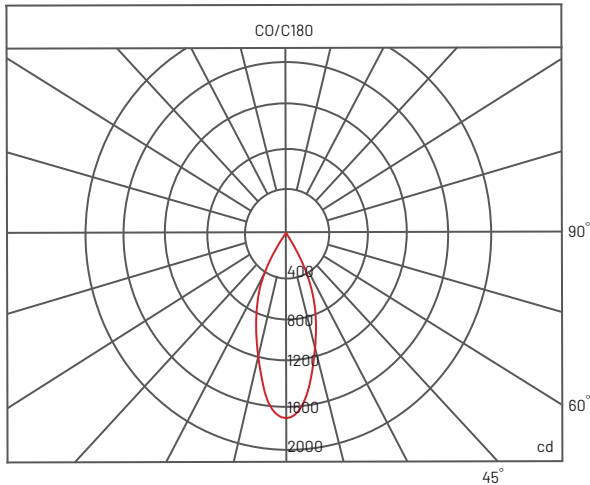

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL706 - WH - 3000K - 24° - DIM]

