

ABOUT

- Recessed LED downlight
- Aluminium body and matte powder coat finish
- Small and versatile, suitable for cabinets and niche areas
- Ideal for areas that require minimalistic appeal
- C-TICK and SAA Approved

Trim Colour

○ White / ● Black

Colour Temperature

3000K / 4000K / 5000K

Dimming

Optional

Light Size

Ø80 mm x H138 mm

Overall Size

H215 mm x L200 mm

Beam Angle Selection

15° / 24° / 38°

Wattage

25 W

Luminous Flux

1928 lm

Colour Rendering

Index 93+

Power Factor

> 0.96

Efficiency

79.35 lm/W

LED Type

CREE CXA1816

Driver System

Lifud LED Driver

IES



Available

Warranty

2 Years

PHOTOMETRIC

SRL3525S / 25W / 24° / 3000K

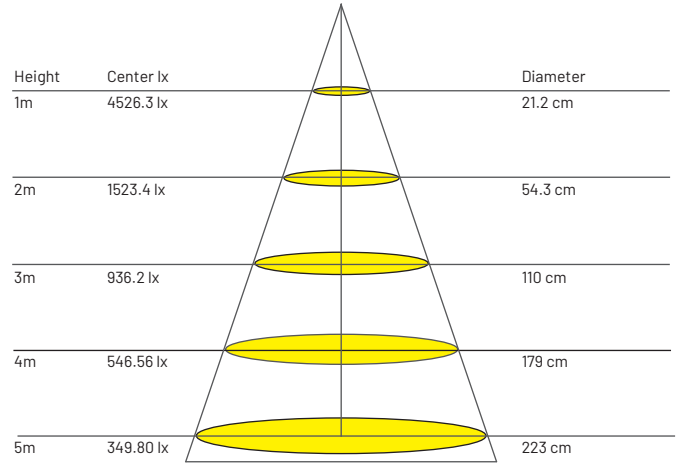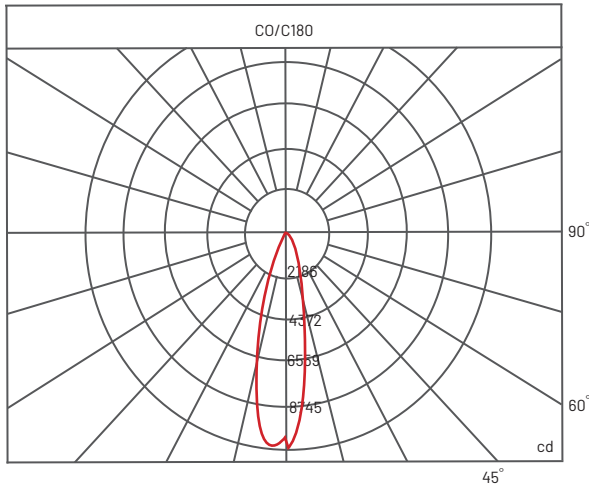

*All the test results are based on individual light setting, the outcomes may be varied as in different environment conditions

PRODUCT ORDER CODE

[E.G. SRL3525S - WH - 3000K - 15° - DIM]

